


LUNL 214.830.1/DALI



Colours	Article no.	EAN
silver	665812	4043544751256
black	665813	4043544751263
white	665814	4043544751270

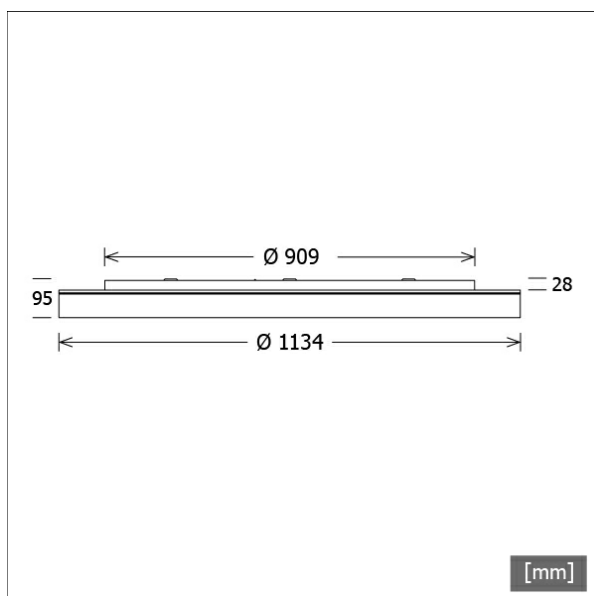

Description

- can be used as ceiling, wall or pendant luminaire (suspension to be ordered separately)
- direct illumination with light-effect ring
- outstanding ease of maintenance
- no UV and thermal emissions
- luminaire consisting of sheet steel housing for ballast and light unit
- light unit can be separated from ballast housing without tools via bayonet catch (with safety rope)
- opal acrylic glass diffuser
- ballast housing for direct screw mounting
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	993704 993702
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	116.2 W
System power	13970 lm
Luminaire luminous flux	120.22 lm/W
System efficiency	163.00 lm/W
Module efficiency	≤ 22
UGR class	220 - 240 V / 50 - 60 Hz
Supply voltage	I
Protection class	IP20
Type of protection	

Dimensions / Weights

Outer diameter	1134 mm
Height	95 mm
Net weight	25.86 kg
Gross weight	69.86 kg

LUNL 214.830.1/DALI

Lunata Large (1xLED 116W 830/3000K 13970lm)



	C0	C90	C180	C270
0°	348	348	348	348
15°	335	334	335	334
30°	296	295	296	295
45°	233	235	233	235
60°	155	155	155	155
75°	65	65	65	65
90°	1	1	1	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	9.08	9.09	540.4
6.0	18.16	18.17	135.1
9.0	27.24	27.26	60.0
12.0	36.33	36.35	33.8
15.0	45.41	45.43	21.6

η	LED
Efficiency	120 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	116 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.6
UGR C90/C270	21.6
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

Accessories



L 82/3000 DIM
wire-rope kit 6-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting