


# APP 10.5040.1.2/DALI



**FAGERHULT**

Colours	Article no.	EAN
black	638586	4043544422651
silver	638587	4043544422668
white	638588	4043544422675

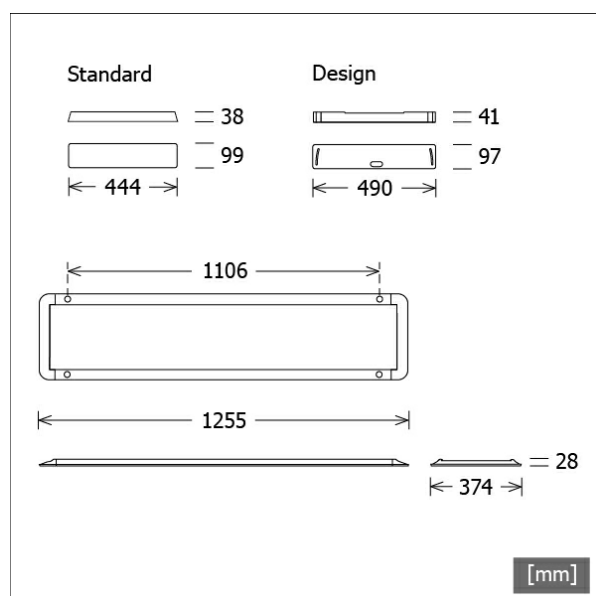

## Description

- rectangular pendant luminaire with direct-indirect lighting for balanced room ambience
- light component: direct 60% / indirect 40%
- outstanding ease of maintenance
- housing made from aluminium and sheet steel with rounded edges
- design canopy (in luminaire colour) made from sheet steel
- height-adjustable Y-wire-rope suspension 2-fold (length: 1500 mm)
- transparent connecting cable
- diffuser made from prismatic acrylic glass with side-emitting LEDs (diffuser is completely transparent when switched off)
- easy screw mounting of the ceiling canopy
- luminaire ready-to-connect with ceiling canopy and feed-in
- ballast (LED converter DALI, dimmable) integrated in ceiling canopy

## Standard options

3000 K

## Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L100 B50 50.000 h
System power	39.0 W
Luminaire luminous flux	5490 lm
System efficiency	140.76 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Length	1255 mm
Width	374 mm
Height	28 mm
Net weight	7.72 kg
Gross weight	8.63 kg

# APP 10.5040.1.2/DALI

## APP 10.5040.1.2/DALI

Appareo Linear (1xLED 39W 840/4000K 5490lm)



	C0	C90	C180	C270
0°	196	196	196	196
30°	153	170	153	170
60°	82	81	82	81
90°	2	1	2	1
120°	196	71	196	71
150°	29	33	29	33
180°	23	23	23	23
cd / 1000 lm				

LDC unsuitable for cone representation.  
The C0 angle is oversized.

<b>η</b>	LED
Efficiency	141 lm/W
Direct/Indirect	↓ 56% / ↑ 44%
System Power	39 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.2
UGR C90/C270	15.9
CIE Flux Codes	46 77 95 56 100
Ra/CRI	>80

LTS

## Accessories



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-A SENSOR**  
Organic Response sensor for surface mounting



**ZB-OR-P SENSOR/3000**  
Organic Response sensor for pendant mounting