

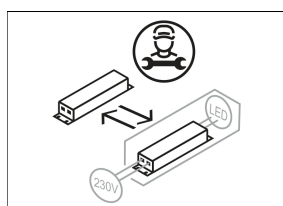


APP 20.5030.1.1/DALI

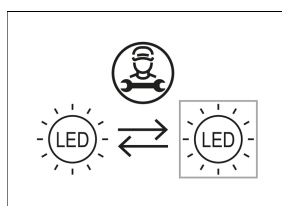

FAGERHULT

Colours	Article no.	EAN
black	652909	7320047182754
silver	652910	4043544684097
white	652911	7320046887940

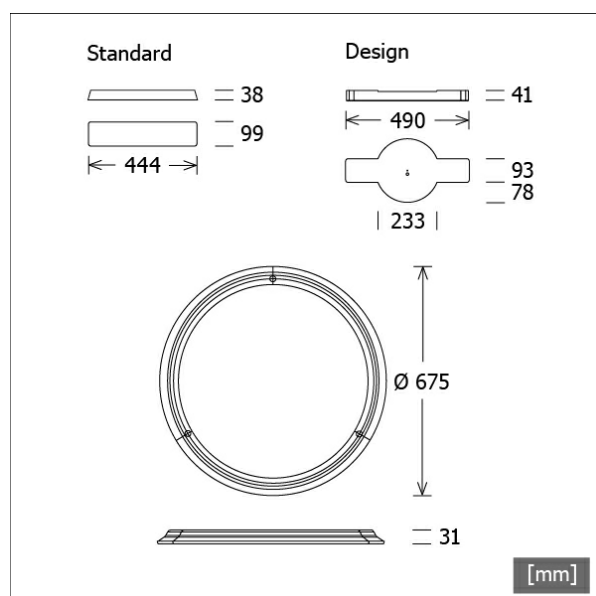

Description

- round pendant luminaire with direct-indirect lighting for balanced room ambience
- light component: direct 57% / indirect 43%
- outstanding ease of maintenance
- housing made from die-cast aluminium
- standard canopy made from white plastic (can be placed into ceiling)
- height-adjustable Y-wire-rop suspension 3-fold (length: 2800 mm)
- transparent connecting cable
- diffuser made from prismatic acrylic glass with side-emitting LEDs (diffuser is completely transparent when switched off)
- easy screw mounting of the ceiling canopy
- luminaire ready-to-connect with ceiling canopy and feed-in
- ballast (LED converter DALI, dimmable) integrated in ceiling canopy

Standard options

4000 K

Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L100 B50 50.000 h
System power	39.0 W
Luminaire luminous flux	5020 lm
System efficiency	128.71 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	675 mm
Height	31 mm
Net weight	6.43 kg
Gross weight	6.81 kg

APP 20.5030.1.1/DALI

APP 20.5030.1.1/DALI

Appareo Round (1xLED 39W 830/3000K 5020lm)

C0/C180 cd / 1000 lm C90/C270



	C0	C90	C180	C270
0°	199	199	199	199
30°	158	158	158	158
60°	82	79	82	79
90°	2	2	2	2
120°	115	110	115	110
150°	36	36	36	36
180°	30	30	30	30
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	129 lm/W
Direct/Indirect	↓ 54% / ↑ 46%
System Power	39 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.6
UGR C90/C270	16.4
CIE Flux Codes	47 77 94 54 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting