


APP 20.5030.1.2/DALI



FAGERHULT

| Colours | Article no. | EAN |
|---------|-------------|---------------|
| black | 652912 | 4043544616029 |
| silver | 652913 | 4043544616036 |
| white | 652914 | 4043544616043 |

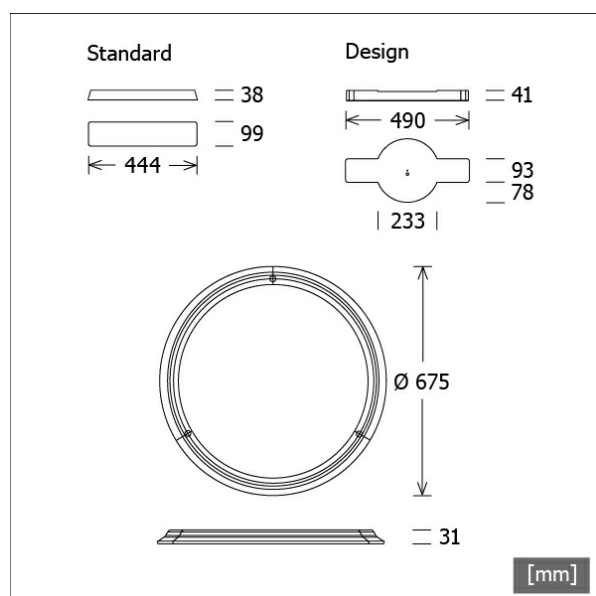

Description

- round pendant luminaire with direct-indirect lighting for balanced room ambience
- light component: direct 57% / indirect 43%
- outstanding ease of maintenance
- housing made from die-cast aluminium
- design canopy (in luminaire colour) made from sheet steel
- height-adjustable Y-wire-rope suspension 3-fold (length: 2800 mm)
- transparent connecting cable
- diffuser made from prismatic acrylic glass with side-emitting LEDs (diffuser is completely transparent when switched off)
- easy screw mounting of the ceiling canopy
- luminaire ready-to-connect with ceiling canopy and feed-in
- ballast (LED converter DALI, dimmable) integrated in ceiling canopy

Standard options

4000 K

Lighting data / Norms

| | |
|-------------------------|-----------------------------|
| Lamps | LED Modul / CRI 80 / 3000 K |
| Lifetime | L100 B50 50.000 h |
| System power | 39.0 W |
| Luminaire luminous flux | 5020 lm |
| System efficiency | 128.71 lm/W |
| UGR class | ≤19 |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | I |
| Type of protection | IP20 |


Dimensions / Weights

| | |
|----------------|---------|
| Outer diameter | 675 mm |
| Height | 31 mm |
| Net weight | 7.08 kg |
| Gross weight | 8.26 kg |

APP 20.5030.1.2/DALI

APP 20.5030.1.2/DALI

Appareo Round (1xLED 39W 830/3000K 5020lm)



| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 199 | 199 | 199 | 199 |
| 30° | 158 | 158 | 158 | 158 |
| 60° | 82 | 79 | 82 | 79 |
| 90° | 2 | 2 | 2 | 2 |
| 120° | 115 | 110 | 115 | 110 |
| 150° | 36 | 36 | 36 | 36 |
| 180° | 30 | 30 | 30 | 30 |
| cd / 1000 lm | | | | |

LDC unsuitable for cone representation.
The C0 angle is oversized.

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 129 lm/W |
| Direct/Indirect | ↓ 54% / ↑ 46% |
| System Power | 39 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 16.6 |
| UGR C90/C270 | 16.4 |
| CIE Flux Codes | 47 77 94 54 100 |
| Ra/CRI | >80 |

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting