

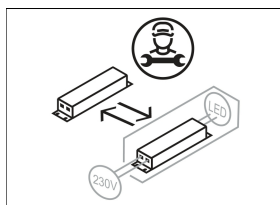


Pendant

LUZ-PT13 104.840.60

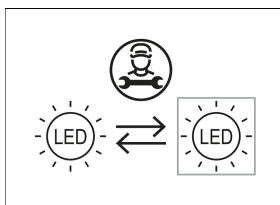

| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 666390 | 4043544757050 |
| black | 666391 | 4043544757067 |
| white | 666392 | 4043544757074 |

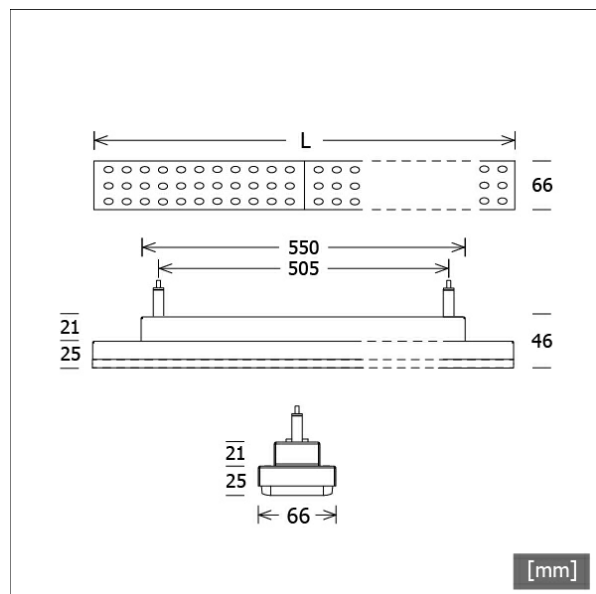

Description

- pendant luminaire in rectangular design for track mounting and diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- wire-rope suspension 2-fold with height adjustment and 3-phase track adapter (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

| | |
|-------------------------|---|
| Lamps | LED Modul / CRI 80 / 4000 K |
| Lifetime | L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h |
| System power | 33,6 W |
| Luminaire luminous flux | 5070 lm |
| System efficiency | 150.89 lm/W |
| Module efficiency | 193.50 lm/W |
| UGR class | ≤25 |
| Beam range | Wide Flood |
| Beam angle | 60° |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | I |
| Type of protection | IP20 |

Dimensions / Weights


| | |
|--------------|---------|
| Length | 873 mm |
| Width | 66 mm |
| Height | 46 mm |
| Net weight | 1.89 kg |
| Gross weight | 1.99 kg |

Pendant


LUZ-PT13 104.840.60

LUZ-PT13 104.840.60

LUZ | Pendant Track (1xLED 34W 840/4000K 5070lm)



| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 800 | 800 | 800 | 800 |
| 15° | 887 | 857 | 887 | 857 |
| 30° | 342 | 377 | 342 | 377 |
| 45° | 112 | 117 | 112 | 117 |
| 60° | 54 | 50 | 54 | 50 |
| 75° | 34 | 25 | 34 | 25 |
| 90° | 13 | 1 | 13 | 1 |
| cd / 1000 lm | | | | |



| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 149 lm/W |
| Direct/Indirect | ↓ 99% / ↑ 1% |
| System Power | 34 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 22.8 |
| UGR C90/C270 | 22.3 |
| CIE Flux Codes | 76 90 97 99 100 |
| Ra/CRI | >80 |

LTS

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)