

## Pendant

## LUZ-PT14 103.830.60/DALI-ST



| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| silver  | 666399      | 4043544757142 |
| black   | 666400      | 4043544757159 |
| white   | 666401      | 4043544757166 |



## Description

- pendant luminaire in rectangular design for track mounting and diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- wire-rope suspension 2-fold with height adjustment and 3-phase track adapter DALI (ONETrack), (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated (with DALI dimming)



## Standard options



## Special options



## Lighting data / Norms

|                         |   |
|-------------------------|---|
| Lamps                   | LED Modul / CRI 80 / 3000 K                               |
| Lifetime                | L90 B50 50.000 h<br>L80 B50 100.000 h<br>L80 B20 50.000 h |
| System power            | 21.5 W  |
| Luminaire luminous flux | 3270 lm   |
| System efficiency       | 152.09 lm/W   |
| Module efficiency       | 160.00 lm/W   |
| UGR class               | ≤22   |
| Beam range              | Wide Flood  |
| Beam angle              | 60°   |
| Supply voltage          | 220 - 240 V / 50 - 60 Hz                                  |
| Protection class        | I   |
| Type of protection      | IP20  |

## Dimensions / Weights


|              |         |
|--------------|---------|
| Length       | 1160 mm |
| Width        | 66 mm   |
| Height       | 46 mm   |
| Net weight   | 2.53 kg |
| Gross weight | 2.66 kg |

## Pendant

## LUZ-PT14 103.830.60/DALI-ST

## LUZ-PT14 103.830.60/DALI-ST

LUZ | Pendant Track (1xLED 22W 830/3000K 3270lm)

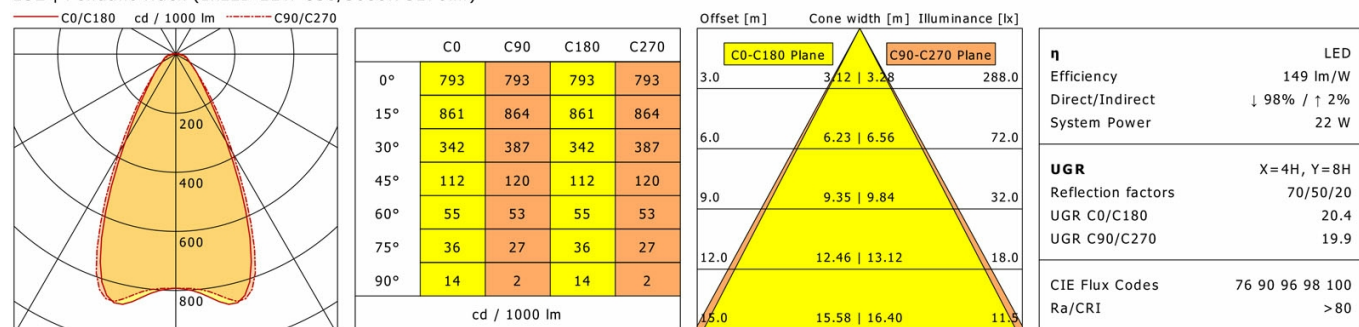

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ZB-OR DONGLE**  
 Organic Response IR dongle kit



**ZB-OR GATEWAY**  
 Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
 Organic Response sensor for track mounting