

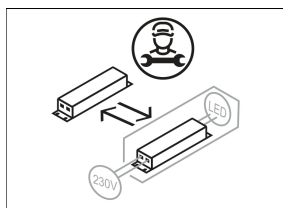


## Pendant

## LUZ-PT15 104.840.60/DALI-ST



Colours	Article no.	EAN
silver	666429	4043544757449
black	666430	4043544757456
white	666431	4043544757463

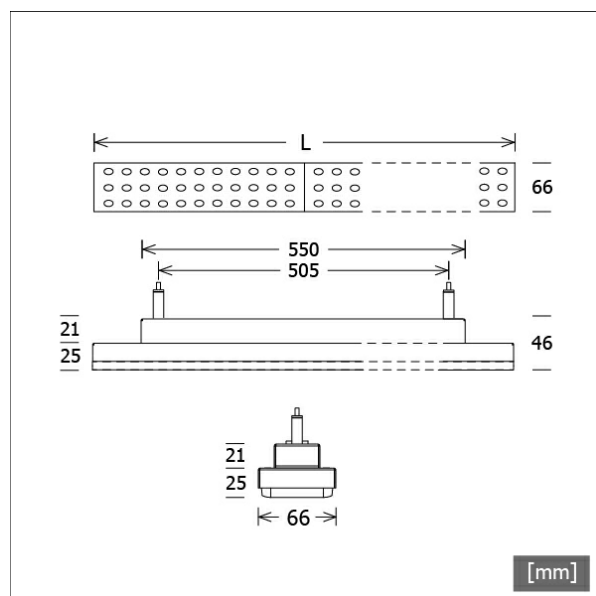

## Description

- pendant luminaire in rectangular design for track mounting and diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- wire-rope suspension 2-fold with height adjustment and 3-phase track adapter DALI (ONETrack), (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated (with DALI dimming)



## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	26.3 W
Luminaire luminous flux	4260 lm
System efficiency	161.97 lm/W
Module efficiency	193.50 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

## Dimensions / Weights


Length	1447 mm
Width	66 mm
Height	46 mm
Net weight	3.05 kg
Gross weight	3.21 kg

## Pendant

## LUZ-PT15 104.840.60/DALI-ST

**LUZ-PT15 104.840.60/DALI-ST**

LUZ | Pendant Track (1xLED 26W 840/4000K 4260lm)

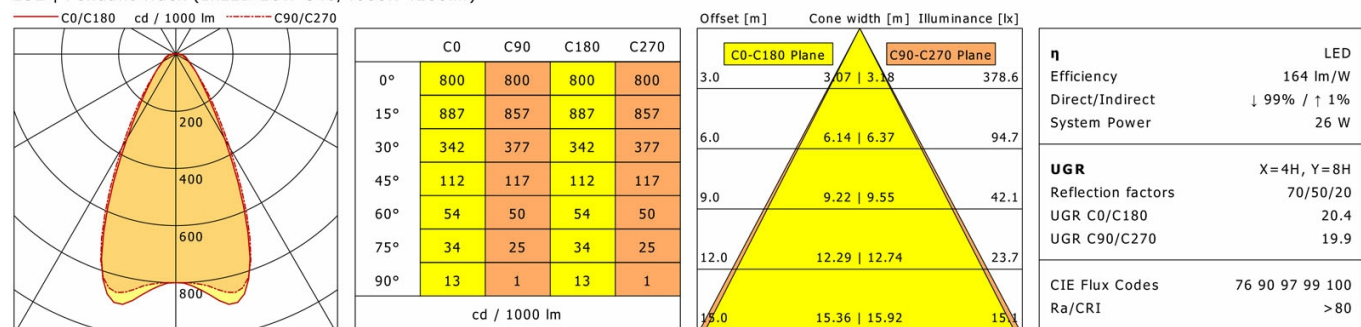

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ZB-OR DONGLE**  
 Organic Response IR dongle kit



**ZB-OR GATEWAY**  
 Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
 Organic Response sensor for track mounting