


## Pendant

## LUZ-PT22 103.830.AS/DALI-ST



Colours	Article no.	EAN
silver	666784	4043544760982
black	666785	4043544760999
white	666786	4043544761002

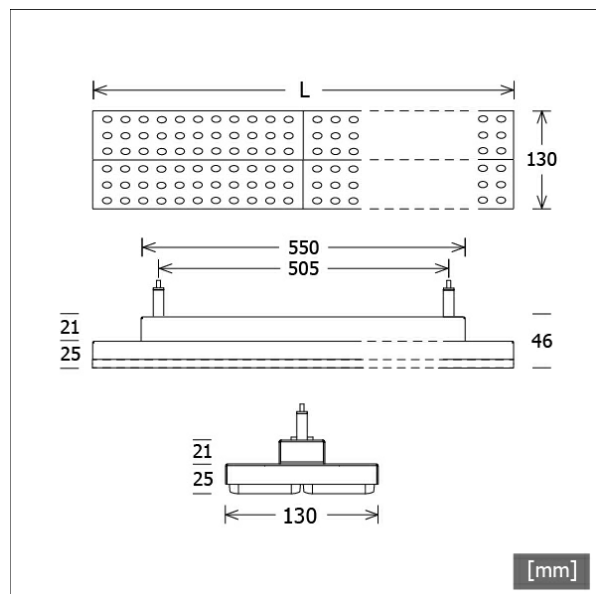

## Description

- pendant luminaire in rectangular design for track mounting and asymmetrical light distribution for wall illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- wire-rope suspension 2-fold with height adjustment and 3-phase track adapter DALI (ONETrack), (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated (with DALI dimming)

## Standard options



## Special options



## Lighting data / Norms

<b>Lamps</b>	LED Modul / CRI 80 / 3000 K
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	21.5 W
<b>Luminaire luminous flux</b>	3240 lm
<b>System efficiency</b>	150.69 lm/W
<b>Module efficiency</b>	160.00 lm/W
<b>UGR class</b>	≤25
<b>Beam range</b>	Asymmetric
<b>Beam angle</b>	Asymmetric
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	I
<b>Type of protection</b>	IP20

## Dimensions / Weights


<b>Length</b>	587 mm
<b>Width</b>	130 mm
<b>Height</b>	46 mm
<b>Net weight</b>	2.56 kg
<b>Gross weight</b>	2.67 kg

Pendant

# LUZ-PT22 103.830.AS/DALI-ST

## LUZ-PT22 103.830.AS/DALI-ST

LUZ | Pendant Track (1xLED 22W 830/3000K 3240lm)



	C0	C90	C180	C270
0°	488	488	488	488
15°	733	463	337	463
30°	611	331	159	331
45°	279	184	75	184
60°	101	89	59	89
75°	33	36	47	36
90°	7	2	8	2
cd / 1000 lm				

LDC unsuitable for cone representation.  
Asymmetric LDC.

<b>η</b>	LED
Efficiency	147 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	22 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.1
UGR C90/C270	22.5
CIE Flux Codes	64 88 97 99 100
Ra/CRI	>80

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 4000 mm)



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting