



CLO-A 105.1217.830/DALI



Colours	Article no.	EAN
silver	667615	4043544769398
white	667616	4043544769404

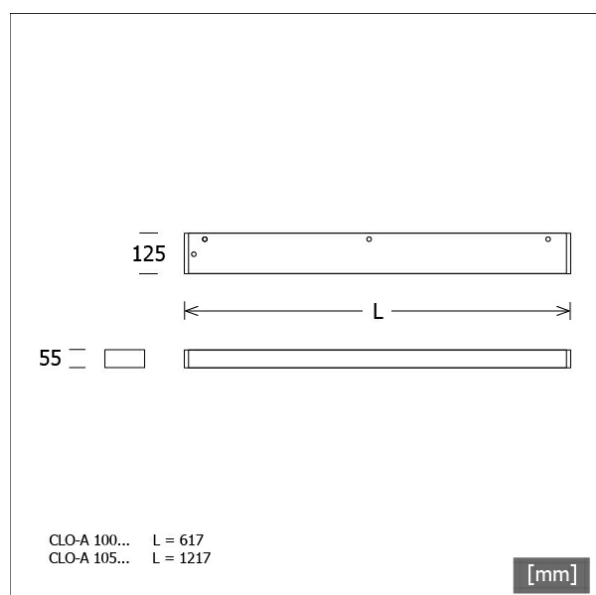

Description

- dimmable ceiling luminaire in rectangular design for direct lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- end covers made from die-cast aluminium with cable inlet (1-phase through-wiring possible)
- optimal glare control via double parabolic reflector louvre with satin matt metallised aluminium side and cross-blades with an integrated opal foil
- direct screw mounting on ceiling
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Lighting data / Norms


Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L100 B50 50.000 h
System power	39.0 W
Luminaire luminous flux	4990 lm
System efficiency	127.94 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	1217 mm
Width	125 mm
Height	55 mm
Net weight	3.10 kg
Gross weight	3.58 kg

CLO-A 105.1217.830/DALI

Closs | Decke (1xLED 39W 830/3000K 4990lm)



	C0	C90	C180	C270
0°	434	433	434	433
15°	445	405	445	405
30°	483	336	483	336
45°	356	240	356	240
60°	61	21	61	21
75°	4	2	4	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	7.14	5.93	240.5
6.0	14.27	11.85	60.1
9.0	21.41	17.78	26.7
12.0	28.55	23.70	15.0
15.0	35.68	29.63	9.6

η	LED
Efficiency	128 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	39 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.8
UGR C90/C270	20.6
CIE Flux Codes	64 98 100 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting