


## Pendant

## LUZ-PT23 105.830.AS



Colours	Article no.	EAN
silver	666805	4043544761194
black	666806	4043544761200
white	666807	4043544761217

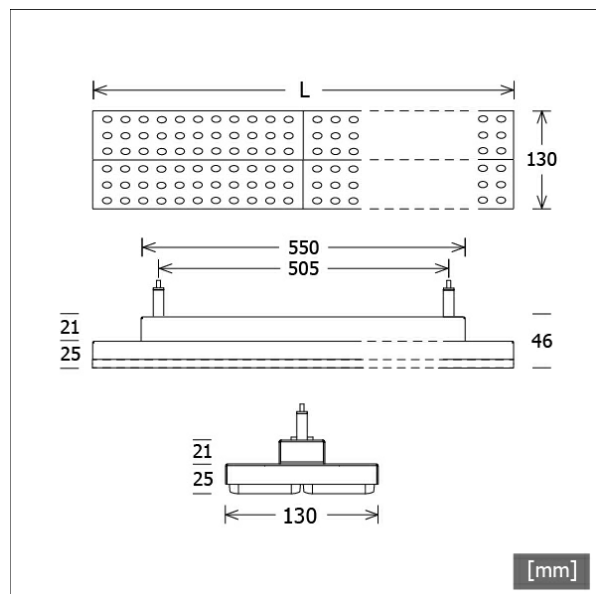


## Description

- pendant luminaire in rectangular design for track mounting and asymmetrical light distribution for wall illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- wire-rope suspension 2-fold with height adjustment and 3-phase track adapter (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated

## Standard options



## Special options



## Lighting data / Norms

<b>Lamps</b>	LED Modul / CRI 80 / 3000 K
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	31.6 W
<b>Luminaire luminous flux</b>	4840 lm
<b>System efficiency</b>	153.16 lm/W
<b>Module efficiency</b>	160.00 lm/W
<b>UGR class</b>	≤25
<b>Beam range</b>	Asymmetric
<b>Beam angle</b>	Asymmetric
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	I
<b>Type of protection</b>	IP20

## Dimensions / Weights


<b>Length</b>	873 mm
<b>Width</b>	130 mm
<b>Height</b>	46 mm
<b>Net weight</b>	3.08 kg
<b>Gross weight</b>	3.23 kg

Pendant

# LUZ-PT23 105.830.AS

## LUZ-PT23 105.830.AS

LUZ | Pendant Track (1xLED 32W 830/3000K 4840lm)



	C0	C90	C180	C270
0°	492	492	492	492
15°	732	466	358	466
30°	608	333	172	333
45°	265	189	78	189
60°	92	90	57	90
75°	32	36	46	36
90°	7	2	8	2
cd / 1000 lm				

LDC unsuitable for cone representation.  
Asymmetric LDC.

<b>η</b>	LED
Efficiency	151 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	32 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.8
UGR C90/C270	22.4
CIE Flux Codes	64 88 97 99 100
Ra/CRI	>80

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 4000 mm)



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)