


## Pendant

## LUZ-PT32 110.840.BW



| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| silver  | 666679      | 4043544759931 |
| black   | 666680      | 4043544759948 |
| white   | 666681      | 4043544759955 |

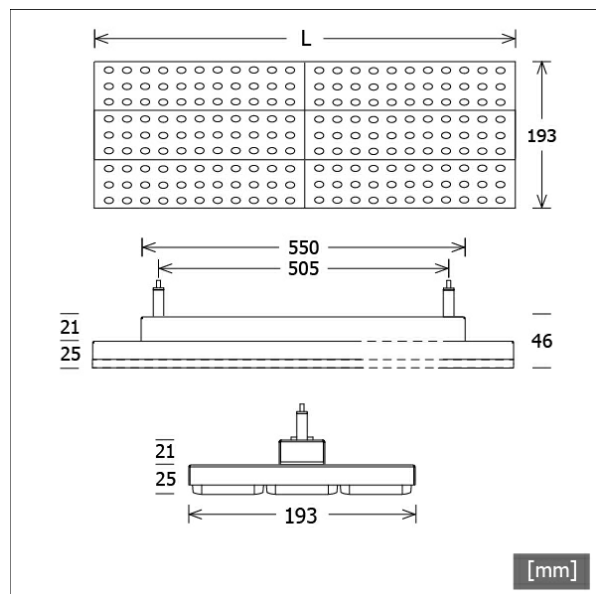

## Description

- pendant luminaire in rectangular design for track mounting
- batwing light distribution for special requirements of goods lighting (e.g. ways between shelves)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- wire-rope suspension 2-fold with height adjustment and 3-phase track adapter (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated

## Standard options



## Special options



## Lighting data / Norms

|                         |   |
|-------------------------|---|
| Lamps                   | LED Modul / CRI 80 / 4000 K                               |
| Lifetime                | L90 B50 50.000 h<br>L80 B50 100.000 h<br>L80 B20 50.000 h |
| System power            | 64.8 W  |
| Luminaire luminous flux | 10170 lm  |
| System efficiency       | 156.94 lm/W   |
| Module efficiency       | 193.50 lm/W   |
| UGR class               | ≤25   |
| Beam range              | Batwing   |
| Beam angle              | Batwing   |
| Supply voltage          | 220 - 240 V / 50 - 60 Hz                                  |
| Protection class        | I   |
| Type of protection      | IP20  |

## Dimensions / Weights


|              |         |
|--------------|---------|
| Length       | 587 mm  |
| Width        | 193 mm  |
| Height       | 46 mm   |
| Net weight   | 3.11 kg |
| Gross weight | 3.26 kg |

Pendant

# LUZ-PT32 110.840.BW

## LUZ-PT32 110.840.BW

LUZ | Pendant Track (1xLED 65W 840/4000K 10170lm)



|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 430 | 430 | 430  | 430  |
| 15°          | 800 | 346 | 800  | 346  |
| 30°          | 670 | 203 | 670  | 203  |
| 45°          | 213 | 102 | 213  | 102  |
| 60°          | 59  | 63  | 59   | 63   |
| 75°          | 22  | 43  | 22   | 43   |
| 90°          | 4   | 2   | 4    | 2    |
| cd / 1000 lm |     |     |      |      |

LDC unsuitable for cone representation.  
The C90 angle is oversized.

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 156 lm/W        |
| Direct/Indirect    | ↓ 99% / ↑ 1%    |
| System Power       | 65 W            |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 22.7            |
| UGR C90/C270       | 24.4            |
| CIE Flux Codes     | 72 91 98 99 100 |
| Ra/CRI             | >80             |

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 4000 mm)



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)