


LUZ-R12 104.830.60/DALI



Colours	Article no.	EAN
silver	667484	4043544767899
black	667485	4043544767905
white	667486	4043544767912

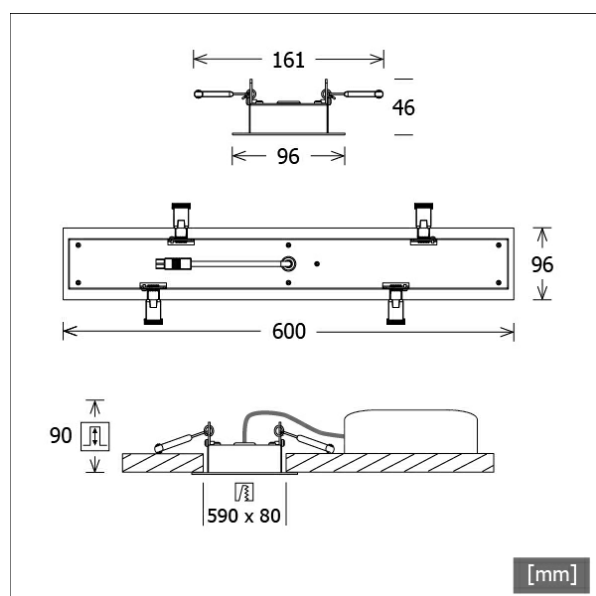

Description

- rectangular recessed luminaire with small installation depth for diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via luminaire housing
- luminaire housing made from sheet steel
- recessed frame made from aluminium
- lens optics made from matt PMMA
- tool-free ceiling mounting via quick-action clamping springs
- connection to ballast via luminaire cable with Wieland female connector BST14I2F B1
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms


Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	35.3 W
Luminaire luminous flux	4630 lm
System efficiency	131.16 lm/W
Module efficiency	160.00 lm/W
UGR class	≤25
Beam range	Wide Flood
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	600 mm
Width	96 mm
Height	46 mm
Cut-out (LxW)	590 x 80 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	90 mm
Net weight	1.39 kg
Gross weight	1.46 kg

LUZ-R12 104.830.60/DALI

LUZ | Recessed (1xLED 35W 830/3000K 4630lm 60°)



	C0	C90	C180	C270
0°	816	816	816	816
15°	910	881	910	881
30°	362	392	362	392
45°	115	128	115	128
60°	54	56	54	56
75°	24	28	24	28
90°	0	0	0	0
cd / 1000 lm				



η	LED
Efficiency	132 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	35 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.4
UGR C90/C270	24.3
CIE Flux Codes	78 92 98 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting