

# LUZ-T14 106.840.60/DALI-ST



## Description

- track-mounted luminaire in rectangular design for diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter) integrated (with DALI dimming)


## Standard options



## Special options



Colours	Article no.	EAN
silver	666922	4043544762368
black	666923	4043544762375
white	666924	4043544762382


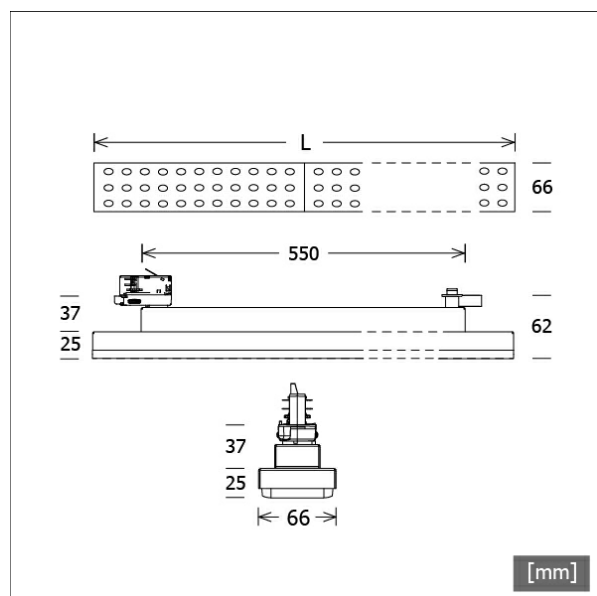


## Lighting data / Norms

<b>Lamps</b>	LED Modul / CRI 80 / 4000 K
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	44.1 W
<b>Luminaire luminous flux</b>	6760 lm
<b>System efficiency</b>	153.28 lm/W
<b>Module efficiency</b>	193.50 lm/W
<b>UGR class</b>	≤25
<b>Beam angle</b>	60°
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	I
<b>Type of protection</b>	IP20


## Dimensions / Weights

<b>Length</b>	1160 mm
<b>Width</b>	66 mm
<b>Height</b>	62 mm
<b>Net weight</b>	2.40 kg
<b>Gross weight</b>	2.53 kg



# LUZ-T14 106.840.60/DALI-ST

LUZ | Track-Mounted (1xLED 44W 840/4000K 6760lm 60°)



	C0	C90	C180	C270
0°	800	800	800	800
15°	887	857	887	857
30°	342	377	342	377
45°	112	117	112	117
60°	54	50	54	50
75°	34	25	34	25
90°	13	1	13	1

cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	3.07   3.18	600.9
6.0	6.14   6.37	150.2
9.0	9.22   9.55	66.8
12.0	12.29   12.74	37.6
15.0	15.36   15.92	24.0

C0-C180 Plane C90-C270 Plane

<b>η</b>	LED
Efficiency	154 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	44 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.8
UGR C90/C270	22.3
CIE Flux Codes	76 90 97 99 100
Ra/CRI	> 80

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ZB-OR DONGLE**  
 Organic Response IR dongle kit



**ZB-OR GATEWAY**  
 Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
 Organic Response sensor for track mounting