


# LUZ-T22 106.830.BW



Colours	Article no.	EAN
silver	667129	4043544764430
black	667130	4043544764447
white	667131	4043544764454

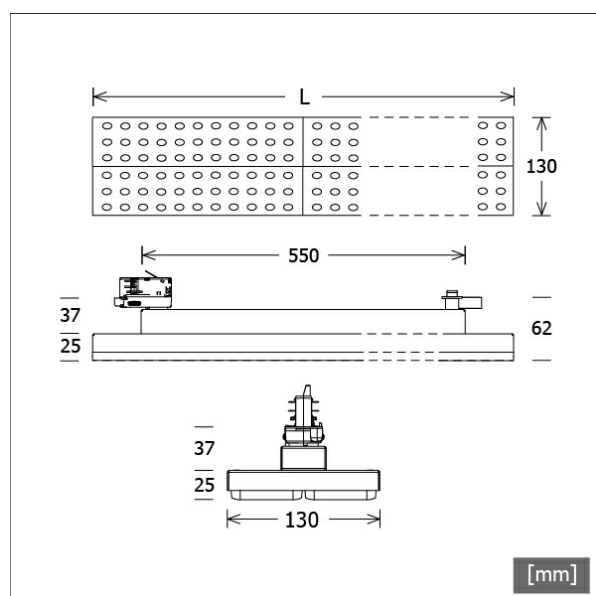

## Description

- track-mounted luminaire in rectangular design with batwing light distribution for special requirements of goods lighting (e.g. ways between shelves)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter
- ballast (LED converter) integrated

## Standard options



## Special options



## Lighting data / Norms


Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	44.1 W
Luminaire luminous flux	6490 lm
System efficiency	147.16 lm/W
Module efficiency	160.00 lm/W
UGR class	≤25
Beam range	Batwing
Beam angle	Batwing
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

## Dimensions / Weights

Length	587 mm
Width	130 mm
Height	62 mm
Net weight	2.32 kg
Gross weight	2.44 kg

# LUZ-T22 106.830.BW

LUZ | Track-Mounted (1xLED 44W 830/3000K 6490lm)



	C0	C90	C180	C270
0°	433	433	433	433
15°	789	347	789	347
30°	659	202	659	202
45°	217	100	217	100
60°	60	62	60	62
75°	23	42	23	42
90°	5	2	5	2

cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	4.52   0.38	312.0
6.0	9.05   0.77	78.0
9.0	13.57   1.15	34.7
12.0	18.09   1.53	19.5
15.0	22.62   1.92	12.5

<b>η</b>	LED
Efficiency	148 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	44 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.7
UGR C90/C270	24.3
CIE Flux Codes	71 91 97 99 100
Ra/CRI	>80

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)