

# LUZ-T32 105.830.BW/DALI-ST



## Description

- track-mounted luminaire in rectangular design with batwing light distribution for special requirements of goods lighting (e.g. ways between shelves)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter) integrated (with DALI dimming)


## Standard options



## Special options



Colours	Article no.	EAN
silver	667168	4043544764829
black	667169	4043544764836
white	667170	4043544764843

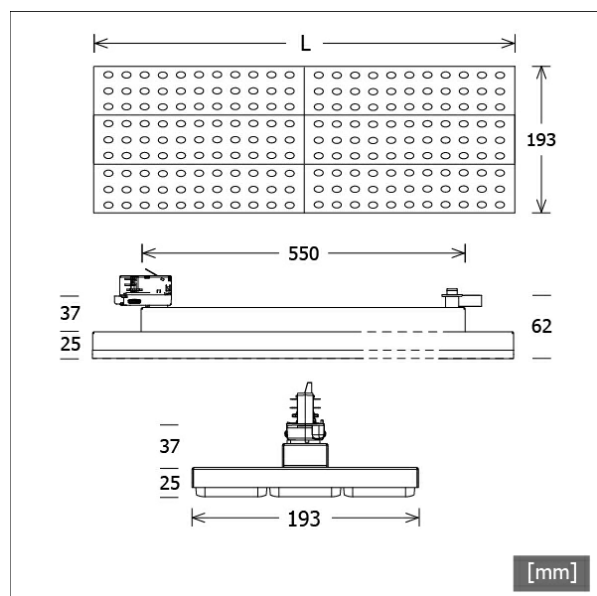

## Lighting data / Norms

<b>Lamps</b>	LED Modul / CRI 80 / 3000 K
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	31.6 W
<b>Luminaire luminous flux</b>	4910 lm
<b>System efficiency</b>	155.37 lm/W
<b>Module efficiency</b>	160.00 lm/W
<b>UGR class</b>	≤22
<b>Beam range</b>	Batwing
<b>Beam angle</b>	Batwing
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	I
<b>Type of protection</b>	IP20

## Dimensions / Weights

<b>Length</b>	587 mm
<b>Width</b>	193 mm
<b>Height</b>	62 mm
<b>Net weight</b>	3.10 kg
<b>Gross weight</b>	3.25 kg

