

LUZ-T32 110.830.AS/DALI-ST



Description

- track-mounted luminaire in rectangular design with asymmetrical light distribution for wall illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter) integrated (with DALI dimming)


Standard options



Special options



Colours	Article no.	EAN
silver	667348	4043544766625
black	667349	4043544766632
white	667350	4043544766649


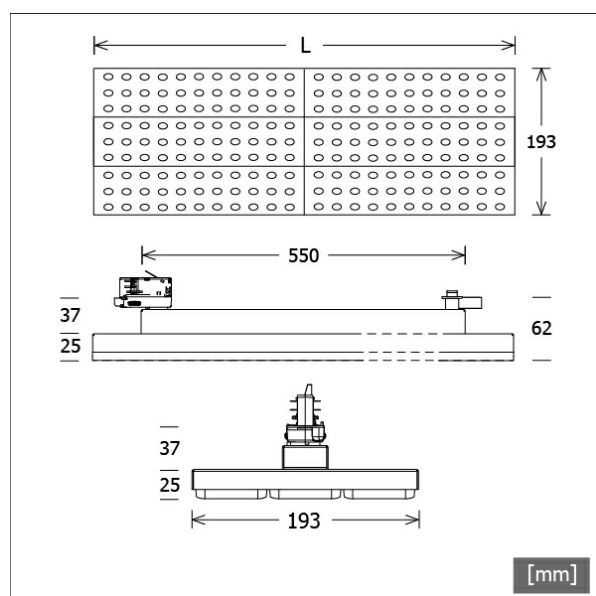


Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	64.8 W
Luminaire luminous flux	9600 lm
System efficiency	148.14 lm/W
Module efficiency	160.00 lm/W
UGR class	≤25
Beam range	Asymmetric
Beam angle	Asymmetric
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	587 mm
Width	193 mm
Height	62 mm
Net weight	3.10 kg
Gross weight	3.25 kg

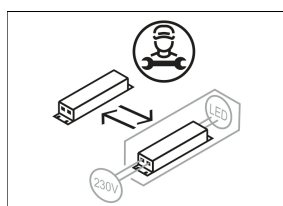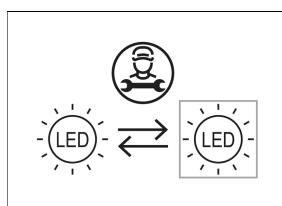

LUZ-T32 110.830.AS/DALI-ST

LUZ | Track-Mounted (1xLED 65W 830/3000K 9600lm)

— C0/C180 cd / 1000 lm — C90/C270



	C0	C90	C180	C270
0°	503	503	503	503
15°	745	477	355	477
30°	605	341	170	341
45°	263	187	78	187
60°	93	90	59	90
75°	31	36	47	36
90°	5	2	6	2

cd / 1000 lm

LDC unsuitable for cone representation.
Asymmetric LDC.

η	LED
Efficiency	148 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	65 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.0
UGR C90/C270	24.7
CIE Flux Codes	65 89 97 99 100
Ra/CRI	> 80

LTS

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-T SENSOR
Organic Response sensor for track mounting