


LUZ-TZ32 105.830.60




| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 667513 | 4043544768100 |
| black | 667514 | 4043544768117 |
| white | 667515 | 4043544768124 |

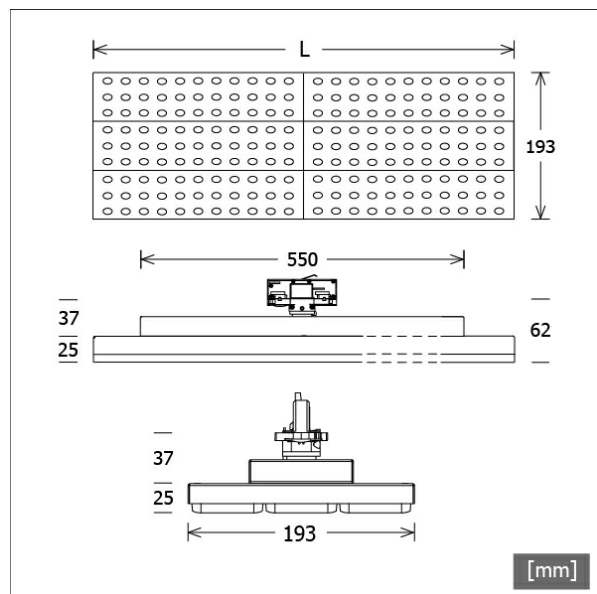

Description

- track-mounted luminaire in rectangular design with rotatable central adapter for diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms


| | |
|--------------------------------|---|
| Lamps | LED Modul / CRI 80 / 3000 K |
| Lifetime | L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h |
| System power | 31.6 W |
| Luminaire luminous flux | 4890 lm |
| System efficiency | 154.74 lm/W |
| Module efficiency | 160.00 lm/W |
| UGR class | ≤22 |
| Beam range | Wide Flood |
| Beam angle | 60° |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | I |
| Type of protection | IP20 |

Dimensions / Weights

| | |
|---------------------|---------|
| Length | 587 mm |
| Width | 193 mm |
| Height | 62 mm |
| Net weight | 2.65 kg |
| Gross weight | 2.80 kg |

LUZ-TZ32 105.830.60

LUZ | Track-Mounted Central Adapter (1xLED 32W 830/3000K 4890lm 60°)

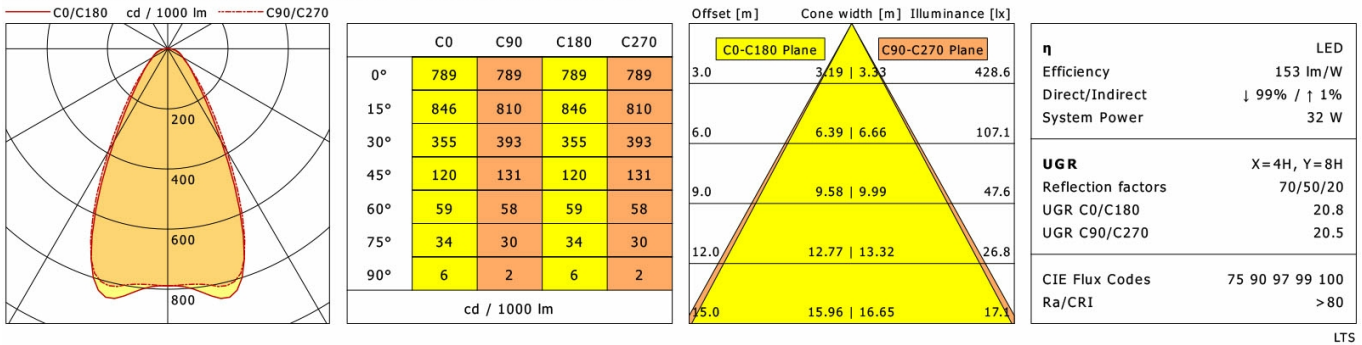

Offset [m] Cone width [m] Illuminance [lx]



η LED

Efficiency 153 lm/W

Direct/Indirect ↓ 99% / ↑ 1%

System Power 32 W

UGR X=4H, Y=8H

Reflection factors 70/50/20

UGR C0/C180 20.8

UGR C90/C270 20.5

CIE Flux Codes 75 90 97 99 100

Ra/CRI >80

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)