



LUZ-TZ32 105.830.60/DALI-ST



Colours	Article no.	EAN
silver	667516	4043544768131
black	667517	4043544768148
white	667518	4043544768155

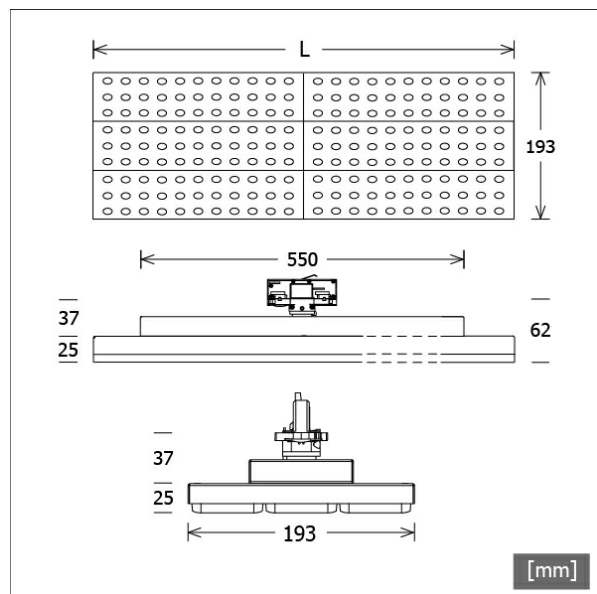

Description

- track-mounted luminaire in rectangular design with rotatable central adapter for diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms


Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	31.6 W
Luminaire luminous flux	4890 lm
System efficiency	154.74 lm/W
Module efficiency	160.00 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	587 mm
Width	193 mm
Height	62 mm
Net weight	2.76 kg
Gross weight	2.91 kg

LUZ-TZ32 105.830.60/DALI-ST

LUZ | Track-Mounted Central Adapter (1xLED 32W 830/3000K 4890lm 60°)

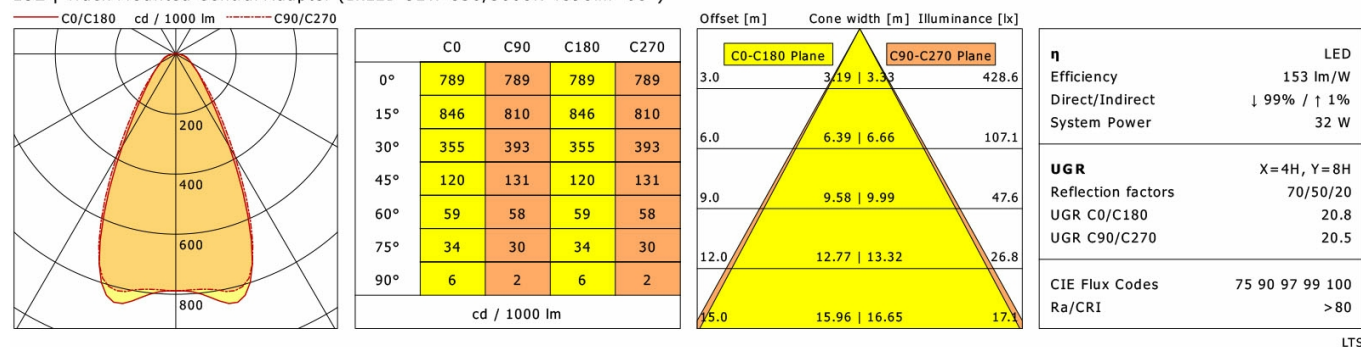

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-T SENSOR
Organic Response sensor for track mounting