


# LUZ-TZ32 105.840.60/DALI-ST



Colours	Article no.	EAN
silver	667522	4043544768193
black	667523	4043544768209
white	667524	4043544768216

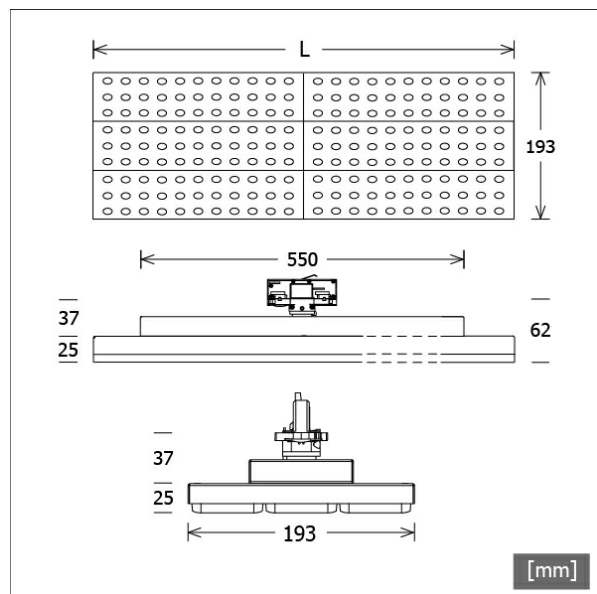

## Description

- track-mounted luminaire in rectangular design with rotatable central adapter for diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter) integrated (with DALI dimming)



## Standard options



## Special options



## Lighting data / Norms


<b>Lamps</b>	LED Modul / CRI 80 / 4000 K
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	31.6 W
<b>Luminaire luminous flux</b>	5110 lm
<b>System efficiency</b>	161.70 lm/W
<b>Module efficiency</b>	193.50 lm/W
<b>UGR class</b>	≤22
<b>Beam range</b>	Wide Flood
<b>Beam angle</b>	60°
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	I
<b>Type of protection</b>	IP20

## Dimensions / Weights

<b>Length</b>	587 mm
<b>Width</b>	193 mm
<b>Height</b>	62 mm
<b>Net weight</b>	2.76 kg
<b>Gross weight</b>	2.91 kg

# LUZ-TZ32 105.840.60/DALI-ST

LUZ | Track-Mounted Central Adapter (1xLED 32W 840/4000K 5110lm 60°)

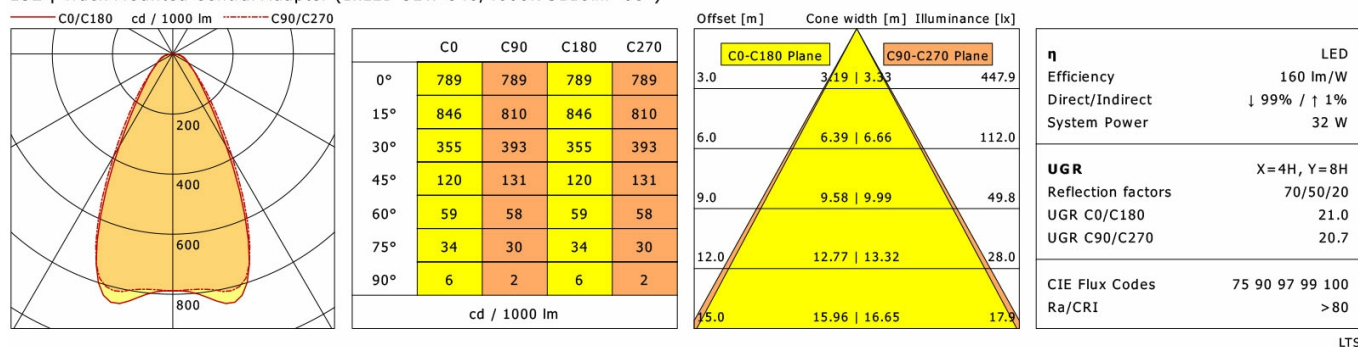

## Accessories



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 4000 mm)



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting