

# LUZ-TZ32 110.840.BW/DALI-ST



## Description

- track-mounted luminaire in rectangular design with rotatable central adapter and batwing light distribution for special requirements of goods lighting (e.g. ways between shelves)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from sheet steel
- protruding lens optics made from matt PMMA
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter) integrated (with DALI dimming)


## Standard options



## Special options



Colours	Article no.	EAN
silver	667558	4043544768551
black	667559	4043544768568
white	667560	4043544768575


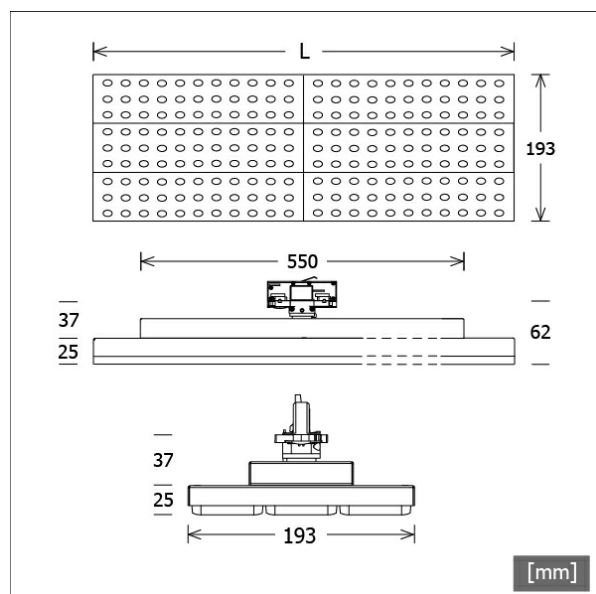


## Lighting data / Norms

<b>Lamps</b>	LED Modul / CRI 80 / 4000 K
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	64.8 W
<b>Luminaire luminous flux</b>	10170 lm
<b>System efficiency</b>	156.94 lm/W
<b>Module efficiency</b>	193.50 lm/W
<b>UGR class</b>	≤25
<b>Beam range</b>	Batwing
<b>Beam angle</b>	Batwing
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	I
<b>Type of protection</b>	IP20


## Dimensions / Weights

<b>Length</b>	587 mm
<b>Width</b>	193 mm
<b>Height</b>	62 mm
<b>Net weight</b>	2.76 kg
<b>Gross weight</b>	2.91 kg



# LUZ-TZ32 110.840.BW/DALI-ST

LUZ | Track-Mounted Central Adapter (1xLED 65W 840/4000K 10170lm)

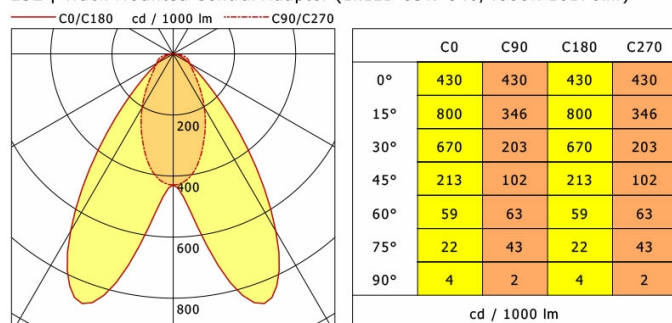

LDC unsuitable for cone representation.  
The C90 angle is oversized.

<b>η</b>	LED
Efficiency	156 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	65 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.7
UGR C90/C270	24.4
CIE Flux Codes	72 91 98 99 100
Ra/CRI	> 80

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 4000 mm)



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting