




LUZ06-A 15.007.40



Colours	Article no.	EAN
black	655326	4043544640949
silver	655327	4043544640956
white	655328	4043544640963

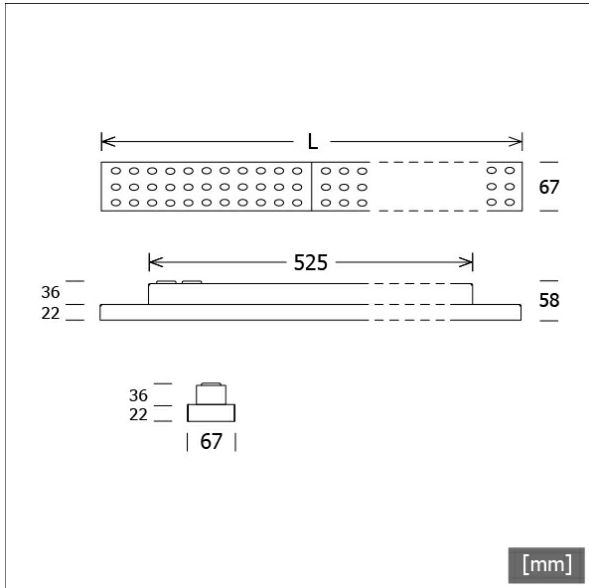

Description

- linear luminaire for surface mounting
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing and partly integrated mounting box made from sheet steel
- tool-free snap-in and slide mechanism between housing and mounting box
- lens optics made from transparent high-gloss PMMA
- easy screw fixing of the mountig box
- 5-pole terminal block
- ballast (LED converter) integrated

Notes

For vertical mounting the weight force must point in the locking direction.

Standard options



Special options



Lighting data / Norms

Lamps	LED Matrix / CRI 85 / 4000 K
	L90 B50 50.000 h
Lifetime	L80 B50 100.000 h
	L80 B20 50.000 h
System power	30.0 W
Luminaire luminous flux	4110 lm
System efficiency	137.00 lm/W
Module efficiency	159.00 lm/W
UGR class	≤19
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	1439 mm
Width	67 mm
Height	58 mm
Net weight	3.13 kg
Gross weight	3.90 kg


LUZ06-A 15.007.40

LUZ06-A 15.007.40

LUZ | Surface-Mounted (1xLED 30W 840/4000K 4110lm)



	C0	C90	C180	C270
0°	749	749	749	749
15°	763	759	763	759
30°	546	535	546	535
45°	114	108	114	108
60°	30	20	30	20
75°	15	9	15	9
90°	4	1	4	1
cd / 1000 lm				



η	LED
Efficiency	137 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	30 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.0
UGR C90/C270	16.4
CIE Flux Codes	85 96 99 100 100
Ra/CRI	>80

LTS