




Workstation Luminaires

LUZ06-A 23.013.40



Colours	Article no.	EAN
black	655386	4043544641540
silver	655387	4043544641557
white	655388	4043544641564

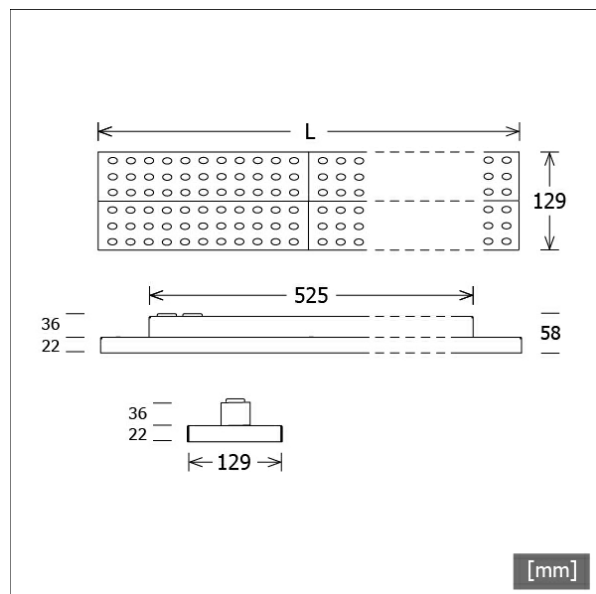

Description

- linear luminaire for surface mounting
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing and partly integrated mounting box made from sheet steel
- tool-free snap-in and slide mechanism between housing and mounting box
- lens optics made from transparent high-gloss PMMA
- easy screw fixing of the mounting box
- 5-pole terminal block
- ballast (LED converter) integrated

Notes

For vertical mounting the weight force must point in the locking direction.

Standard options



Special options



Lighting data / Norms

Lamps	LED Matrix / CRI 85 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	72.0 W
Luminaire luminous flux	9870 lm
System efficiency	137.08 lm/W
Module efficiency	159.00 lm/W
UGR class	≤19
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	867 mm
Width	129 mm
Height	58 mm
Net weight	3.23 kg
Gross weight	3.85 kg

LUZ06-A 23.013.40

LUZ06-A 23.013.40

LUZ | Surface-Mounted (1xLED 72W 840/4000K 9870lm)

