

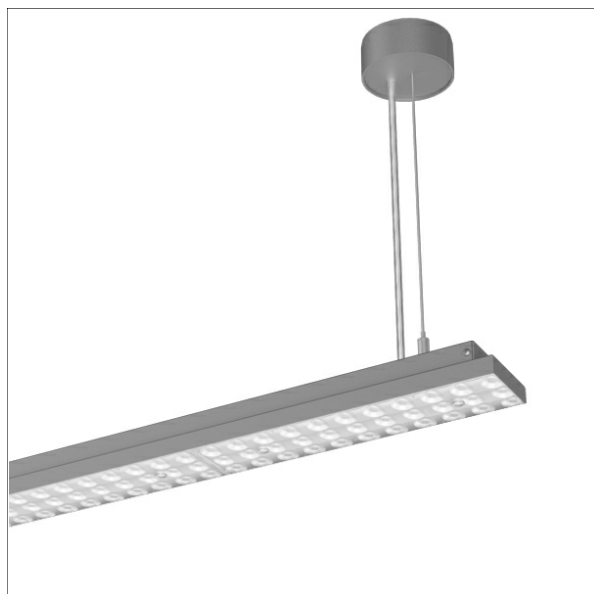



LUZ06-PA 13.007.30



Colours	Article no.	EAN
black	657156	4043544660510
silver	657157	4043544660527
white	657158	4043544660534

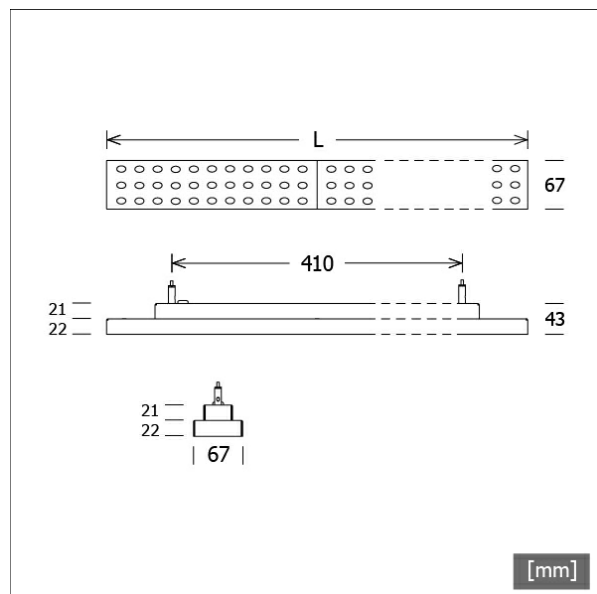

Description

- linear luminaire for pendant mounting
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- luminaire housing and partly integrated ballast housing made from sheet steel
- lens optics made from transparent high-gloss PMMA
- height-adjustable wire-rope suspension with ceiling box and feed-in (length: 1500 mm, cable transparent)
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps

LED Matrix / CRI 85 / 3000 K

Lifetime

 L90 B50 50.000 h
 L80 B50 100.000 h
 L80 B20 50.000 h

System power

18.0 W

Luminaire luminous flux

2380 lm

System efficiency

132.22 lm/W

Module efficiency

152.00 lm/W

UGR class

≤19

Beam angle

60°

Supply voltage

220 - 240 V / 50 - 60 Hz

Protection class

I

Type of protection

IP20

Dimensions / Weights

Length

867 mm

Width

67 mm

Height

43 mm

Net weight

2.19 kg


Gross weight

2.31 kg

LUZ06-PA 13.007.30

LUZ06-PA 13.007.30

LUZ | Pendant (1xLED 18W 830/3000K 2380lm)



	C0	C90	C180	C270
0°	749	749	749	749
15°	763	759	763	759
30°	546	535	546	535
45°	114	108	114	108
60°	30	20	30	20
75°	15	9	15	9
90°	4	1	4	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	4.11	4.08	198.0
6.0	8.22	8.15	49.5
9.0	12.33	12.23	22.0
12.0	16.44	16.31	12.4
15.0	20.56	20.39	7.9

η	LED
Efficiency	132 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.9
UGR C90/C270	16.3
CIE Flux Codes	85 96 99 100 100
Ra/CRI	>80

LTS