


Mounted

ML-A 045.0730.11 AOV



Colours	Article no.	EAN
silver anodised	663045	4043544721105
black	663046	4043544721112
white	663047	4043544721129

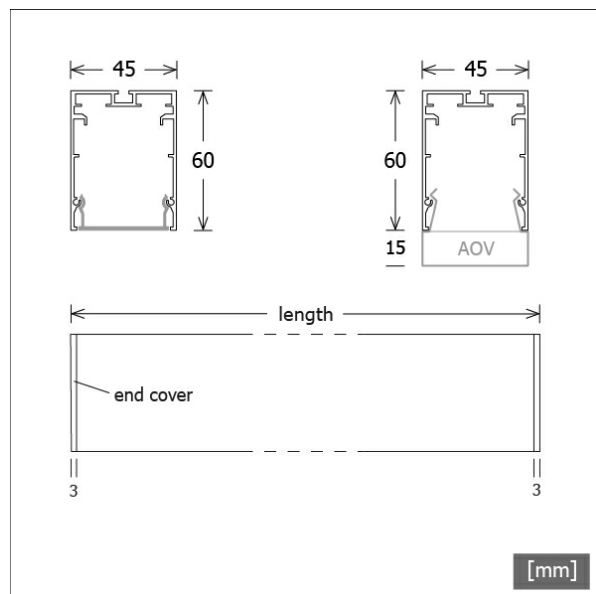


Description

- linear luminaire for direct ceiling or suspended mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- wire-rope suspensions (with feed-in) to be ordered separately
- housing made from aluminium
- end covers made from die-cast zinc
- opal protruding acrylic glass diffuser (15 mm) with profile guide and tool-free snap-in technology
- direct ceiling mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $dT = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833899
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	16.4 W
Luminaire luminous flux	1740 lm
System efficiency	106.09 lm/W
Module efficiency	179.70 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40

Dimensions / Weights

Length	1136 mm
Width	45 mm
Height	75 mm
Net weight	2.28 kg
Gross weight	2.40 kg

ML-A 045.0730.11 AOV

Monoline 045 | Surface-Mounted & Pendant (1xLED 16W 830/3000K 1740lm)



	C0	C90	C180	C270
0°	314	314	314	314
30°	252	244	252	244
60°	140	109	140	109
90°	47	2	47	2
120°	33	1	33	1
150°	16	1	16	1
180°	0	0	0	0
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 88% / ↑ 12%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.0
UGR C90/C270	21.6
CIE Flux Codes	46 74 92 88 100
Ra/CRI	>80

LTS

Accessories



LK-Z045.103.03
wire-rope kit with feed-in
(length: 3000 mm, 3-core)



LK-Z045.103.05
wire-rope kit with feed-in
(length: 5000 mm, 3-core)



LK-Z045.104.03
wire-rope kit without feed-in
(length: 3000 mm)



LK-Z045.104.05
wire-rope kit without feed-in
(length: 5000 mm)