

AQUA 101.840



Description

- rectangular wall luminaire for hygiene rooms (e.g. mirror lighting), cloakrooms and corridors
- suitable for horizontal or vertical wall mounting
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from white finished polycarbonate
- cable entries for recessed and surface mounted installation fitted with blanking grommets
- opal acrylic glass diffuser (tool-free mounting)
- direct screw mounting on wall
- 3-pole terminal block
- ballast (LED converter) integrated

Standard options






Colours	Article no.	EAN
white	658991	4043544781857

Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L70 B50 100.000 h
System power	14.0 W
Luminaire luminous flux	1780 lm
System efficiency	127.14 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP44


Dimensions / Weights

Length	599 mm
Width	54 mm
Height	55 mm
Net weight	0.60 kg
Gross weight	0.64 kg

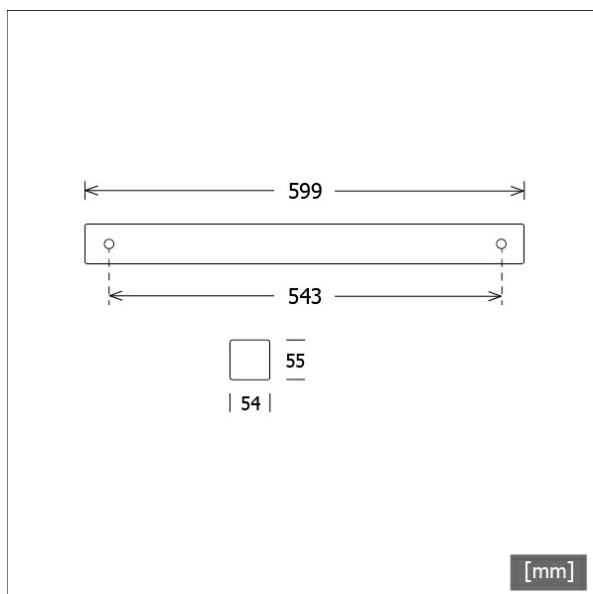

AQUA 101.840

Aqua (1xLED 14W 840/4000K 1780lm)



	C0	C90	C180	C270
0°	178	178	178	178
30°	184	148	184	148
60°	149	78	149	78
90°	92	2	92	2
120°	70	2	70	2
150°	36	3	36	3
180°	2	4	2	4
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	127 lm/W
Direct/Indirect	↓ 75% / ↑ 25%
System Power	14 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.8
UGR C90/C270	21.8
CIE Flux Codes	35 64 85 75 100
Ra/CRI	>80

LTS