



Mounted

ML-A 045.0740.14 APB



Colours	Article no.	EAN
silver anodised	663141	4043544722065
black	663142	4043544722072
white	663143	4043544722089

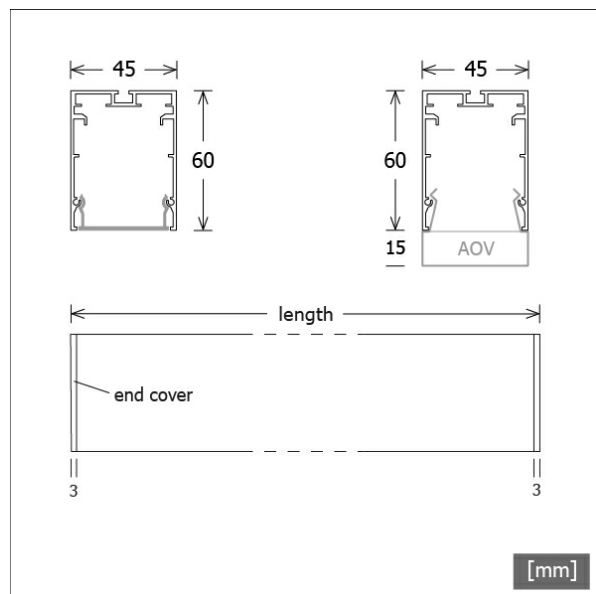

Description

- linear luminaire for direct ceiling or suspended mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- wire-rope suspensions (with feed-in) to be ordered separately
- housing made from aluminium
- end covers made from die-cast zinc
- prismatic flush acrylic glass diffuser with profile guide and tool-free snap-in technology
- direct ceiling mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $dT = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833900 833895
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	20.4 W
Luminaire luminous flux	1950 lm
System efficiency	95.58 lm/W
Module efficiency	187.83 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40

Dimensions / Weights

Length	1416 mm
Width	45 mm
Height	60 mm
Net weight	2.13 kg
Gross weight	2.27 kg

ML-A 045.0740.14 APB

Monoline 045 | Surface-Mounted & Pendant (1xLED 20W 840/4000K 1950lm)

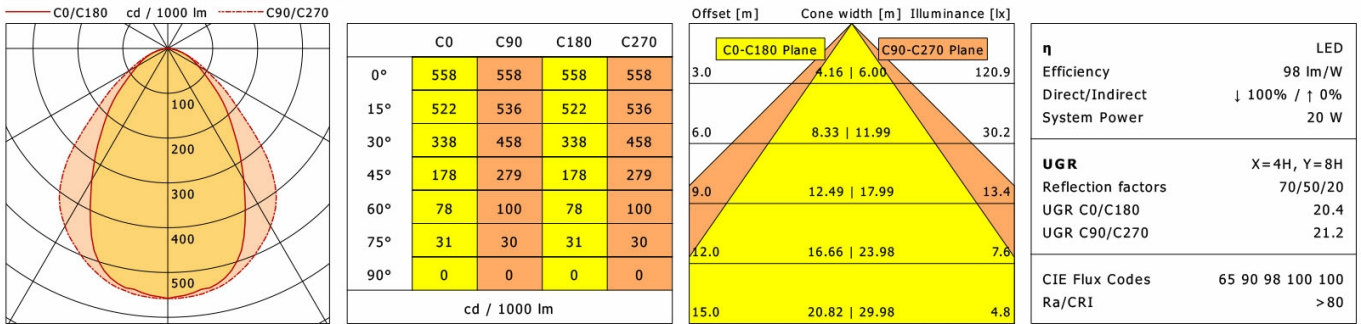

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane
3.0	4.16 6.00	120.9
6.0	8.33 11.99	30.2
9.0	12.49 17.99	13.4
12.0	16.66 23.98	7.6
15.0	20.82 29.98	4.8

η LED

Efficiency 98 lm/W

Direct/Indirect ↓ 100% / ↑ 0%

System Power 20 W

UGR X=4H, Y=8H

Reflection factors 70/50/20

UGR C0/C180 20.4

UGR C90/C270 21.2

CIE Flux Codes 65 90 98 100 100

Ra/CRI >80

Accessories



LK-Z045.103.03
wire-rope kit with feed-in
(length: 3000 mm, 3-core)



LK-Z045.103.05
wire-rope kit with feed-in
(length: 5000 mm, 3-core)



LK-Z045.104.03
wire-rope kit without feed-in
(length: 3000 mm)



LK-Z045.104.05
wire-rope kit without feed-in
(length: 5000 mm)