

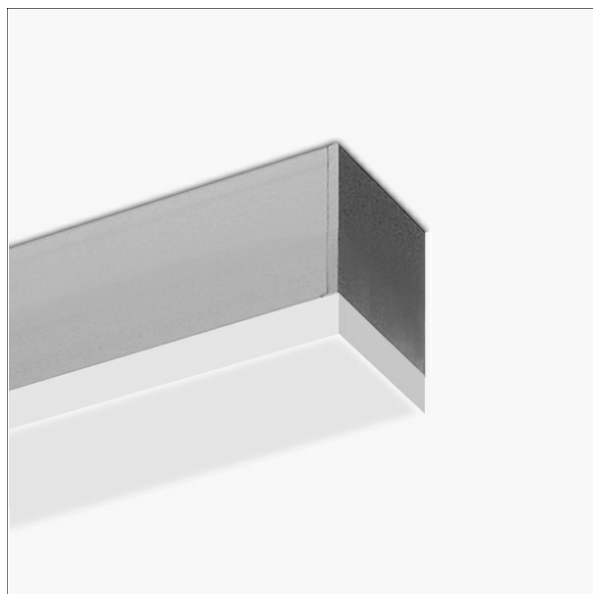



ML-A 070.0730.11 AOV/DALI



Colours	Article no.	EAN
silver anodised	653608	4043544623386
black	653609	4043544623393
white	653610	4043544623409

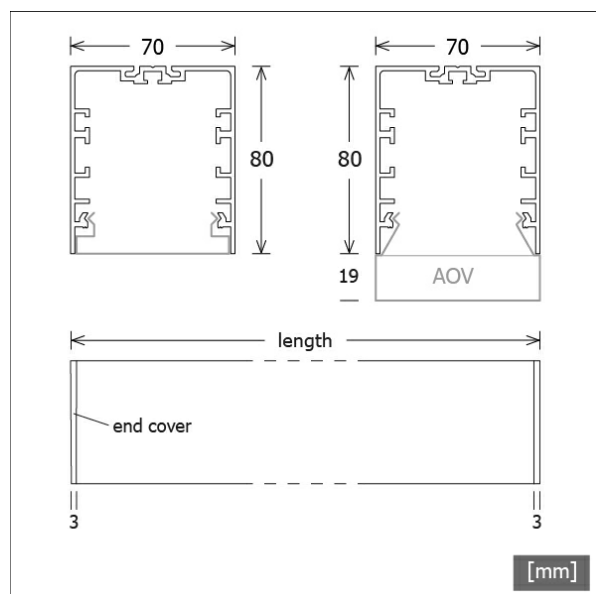

Description

- linear luminaire for direct ceiling, wall or suspended mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- wire-rope suspensions (with feed-in) or wall bracket (2 pieces) to be ordered separately
- housing made from aluminium
- end covers made from die-cast zinc
- opal protruding acrylic glass diffuser (19 mm) with profile guide and tool-free snap-in technology
- direct ceiling or wall mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833877
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	12.5 W
Luminaire luminous flux	1300 lm
System efficiency	104.00 lm/W
Module efficiency	178.36 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40


Dimensions / Weights

Length	1136 mm
Width	70 mm
Height	99 mm
Net weight	4.06 kg
Gross weight	4.49 kg

Mounted

ML-A 070.0730.11 AOV/DALI

Monoline 070 Surface-Mounted & Pendant (1xLED 13W 830/3000K 1300lm)



	C0	C90	C180	C270
0°	309	309	309	309
30°	253	241	253	241
60°	141	113	141	113
90°	42	3	42	3
120°	30	1	30	1
150°	15	1	15	1
180°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
3.0	9.02	7.26	44.7
6.0	18.04	14.53	11.2
9.0	27.05	21.79	5.0
12.0	36.07	29.05	2.8
15.0	45.09	36.31	1.8

η	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.7
UGR C90/C270	19.6
CIE Flux Codes	45 74 92 89 100
Ra/CRI	> 80

LTS

Accessories



LK-Z070.103.03/DIM
 wire-rope kit with feed-in DALI
 (5-core, length: 3000 mm)



LK-Z070.103.05/DIM
 wire-rope kit with feed-in DALI
 (5-core, length: 5000 mm)



LK-Z070.104.03
 wire-rope kit without feed-in
 (length: 3000 mm)



LK-Z070.104.05
 wire-rope kit without feed-in
 (length: 5000 mm)



LK-Z070.114
 wall bracket
 (1 piece)



ZB-OR DONGLE
 Organic Response IR dongle kit



ZB-OR GATEWAY
 Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
 Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
 Organic Response sensor for pendant mounting