




ML-A 070.1030.14 AOV



Colours	Article no.	EAN
silver anodised	663460	4043544725240
black	663461	4043544725257
white	663462	4043544725264

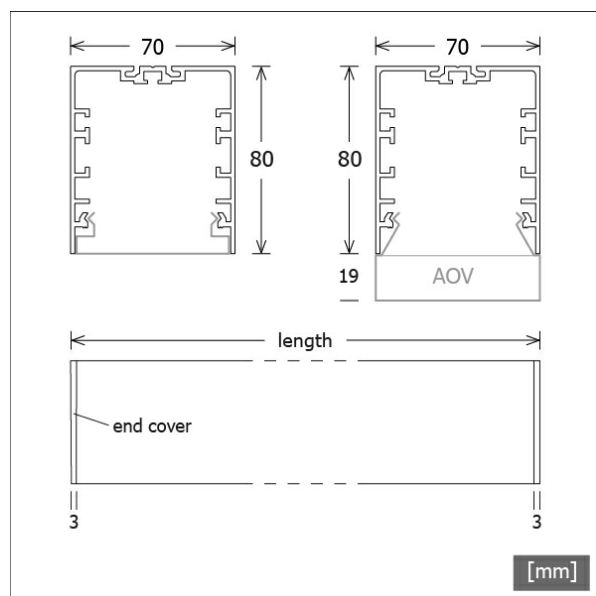

Description

- linear luminaire for direct ceiling, wall or suspended mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- wire-rope suspensions (with feed-in) or wall bracket (2 pieces) to be ordered separately
- housing made from aluminium
- end covers made from die-cast zinc
- opal protruding acrylic glass diffuser (19 mm) with profile guide and tool-free snap-in technology
- direct ceiling or wall mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter) integrated


Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	22.8 W
Luminaire luminous flux	2410 lm
System efficiency	105.70 lm/W
Module efficiency	156.66 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40

Dimensions / Weights

Length	1416 mm
Width	70 mm
Height	99 mm
Net weight	4.80 kg
Gross weight	5.33 kg

ML-A 070.1030.14 AOV

Monoline 070 Surface-Mounted & Pendant (1xLED 23W 830/3000K 2410lm)

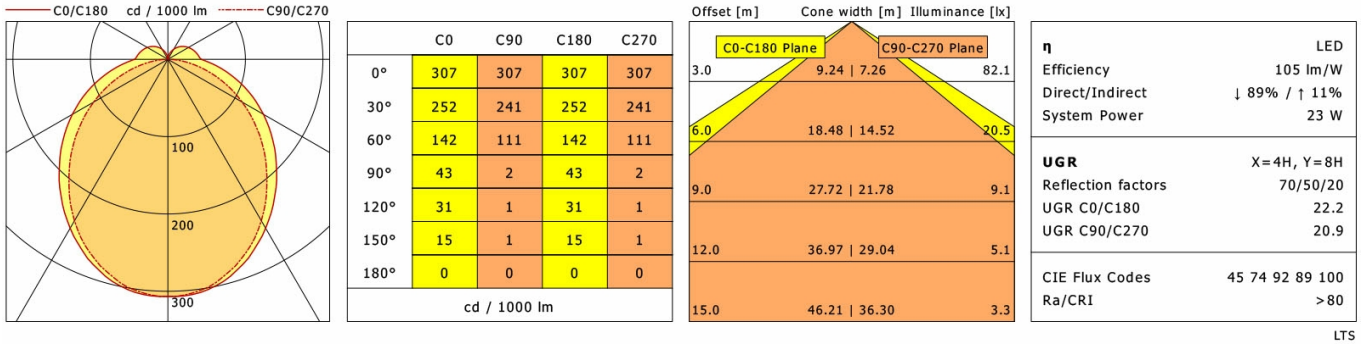

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	9.24 7.26	82.1
6.0	18.48 14.52	20.5
9.0	27.72 21.78	9.1
12.0	36.97 29.04	5.1
15.0	46.21 36.30	3.3

C0-C180 Plane C90-C270 Plane

η	LED
Efficiency	105 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	23 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.2
UGR C90/C270	20.9
CIE Flux Codes	45 74 92 89 100
Ra/CRI	>80

LTS


Accessories




LK-Z070.103.03
wire-rope kit with feed-in
(3-core, length: 3000 mm)



LK-Z070.103.05
wire-rope kit with feed-in
(3-core, length: 5000 mm)



LK-Z070.104.03
wire-rope kit without feed-in
(length: 3000 mm)



LK-Z070.104.05
wire-rope kit without feed-in
(length: 5000 mm)



LK-Z070.114
wall bracket
(1 piece)