



ML-A 070.1040.14 AOB



Colours	Article no.	EAN
silver anodised	663490	4043544725547
black	663491	4043544725554
white	663492	4043544725561

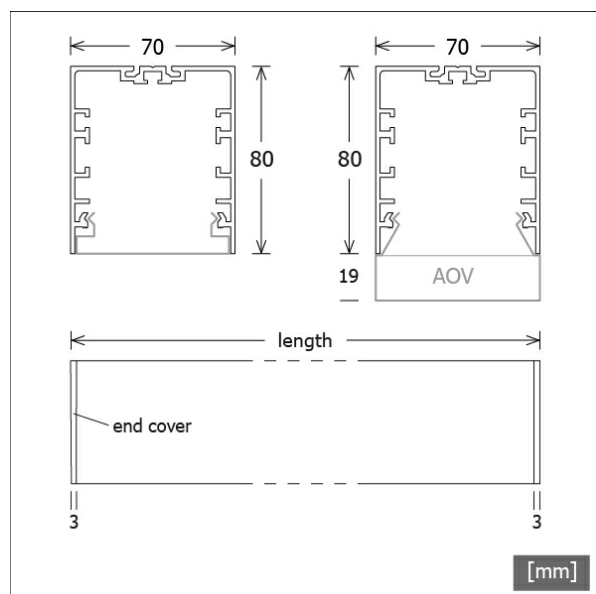

Description

- linear luminaire for direct ceiling, wall or suspended mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- wire-rope suspensions (with feed-in) or wall bracket (2 pieces) to be ordered separately
- housing made from aluminium
- end covers made from die-cast zinc
- opal flush acrylic glass diffuser with profile guide and tool-free snap-in technology
- direct ceiling or wall mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter) integrated


Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	22.8 W
Luminaire luminous flux	2330 lm
System efficiency	102.19 lm/W
Module efficiency	164.17 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40

Dimensions / Weights

Length	1416 mm
Width	70 mm
Height	80 mm
Net weight	4.30 kg
Gross weight	4.83 kg

ML-A 070.1040.14 AOB

Monoline 070 Surface-Mounted & Pendant (1xLED 23W 840/4000K 2330lm)

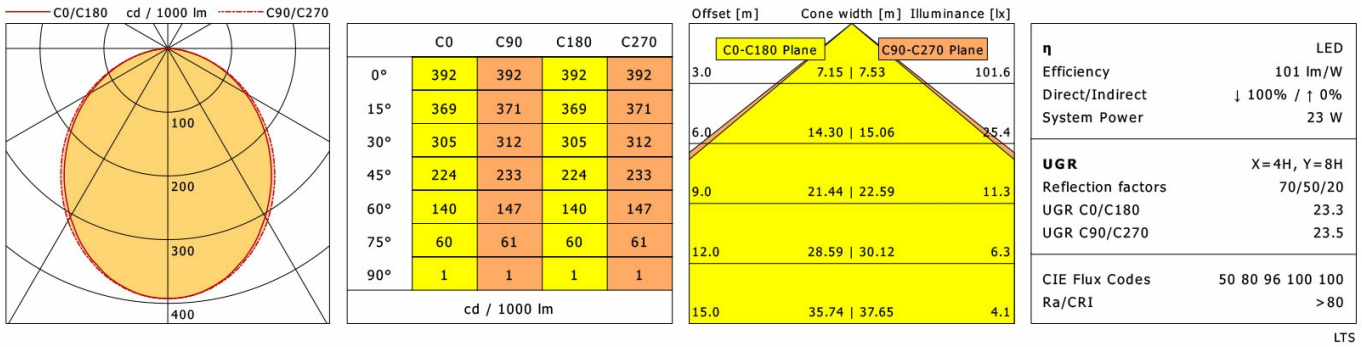

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	7.15 7.53	101.6
6.0	14.30 15.06	25.4
9.0	21.44 22.59	11.3
12.0	28.59 30.12	6.3
15.0	35.74 37.65	4.1

C0-C180 Plane C90-C270 Plane

η	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	23 W

UGR X=4H, Y=8H

Reflection factors	70/50/20
UGR C0/C180	23.3
UGR C90/C270	23.5

CIE Flux Codes 50 80 96 100 100

Ra/CRI >80


Accessories




LK-Z070.103.03
wire-rope kit with feed-in
(3-core, length: 3000 mm)



LK-Z070.103.05
wire-rope kit with feed-in
(3-core, length: 5000 mm)



LK-Z070.104.03
wire-rope kit without feed-in
(length: 3000 mm)



LK-Z070.104.05
wire-rope kit without feed-in
(length: 5000 mm)



LK-Z070.114
wall bracket
(1 piece)