Mounted





IP40

ML-A 070.1130.08 AOB/DALI



Colours	Article no.	EAN
silver anodised	653800	4043544625304
black	653801	4043544625311
white	653802	4043544625328





Description

- linear luminaire for direct ceiling, wall or suspended mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- wire-rope suspensions (with feed-in) or wall bracket (2 pieces) to be ordered separately

CE

- housing made from aluminium
- end covers made from die-cast zinc
- opal flush acrylic glass diffuser with profile guide and tool-free snap-in technology
- direct ceiling or wall mounting via screw fixing
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at dT = 10 Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options

4000 K

Special options



Lighting data / Norms

Lamps EPREL light sources

Lifetime

System power Luminaire luminous flux System efficiency Module efficiency UGR class Supply voltage Protection class Type of protection

Dimensions / Weights

Length	855 mm
Width	70 mm
Height	80 mm
Net weight	2.86 kg
Gross weight	3.18 kg

L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h 33.0 W 3150 lm 95.45 lm/W 178.58 lm/W ≤28 220 - 240 V / 50 - 60 Hz I IP40

LED linear / CRI 80 / 3000 K


833899|833894

Mounted




ML-A 070.1130.08 AOB/DALI

Monoline 070 Surface-Mounted & Pendant (1xLED 33W 830/3000K 3150lm)

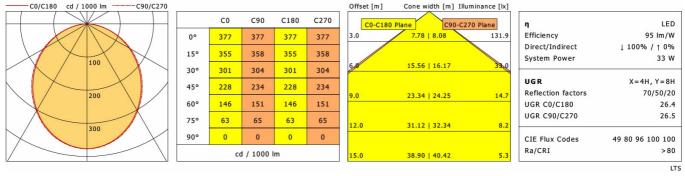

Accessories

8

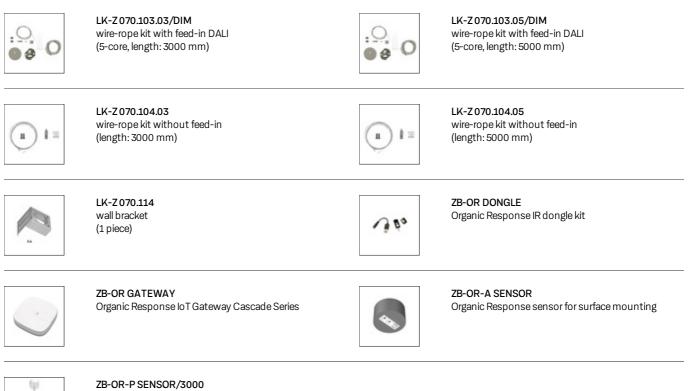

Organic Response sensor for pendant mounting