




ASCL 10.0630.2 SENSO



Colours	Article no.	EAN
silver	634338	4043544364029
white	634339	4043544364036

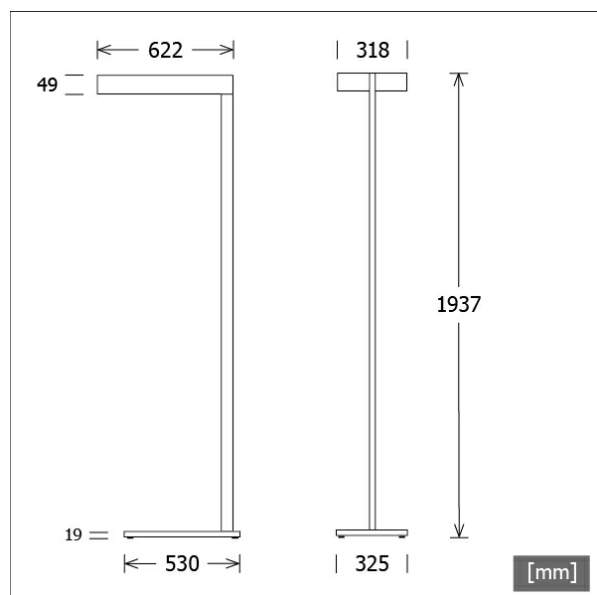

Description

- free-standing luminaire with direct illumination for uniform and glare-free workplace lighting
- no UV and thermal emissions
- twin light-head made from die-cast aluminium
- standard base made from steel St37 (special version ZBB 002 please indicate when ordering)
- rectangular aluminium stand (silver luminaire with silver anodised stand)
- automatic sensors for presence and daylight
- diffusers made from decorative laminated safety glasses with matt foil
- central plug connection to mains (length of connecting cable: approx. 3000 mm), silver luminaire / black cable, white luminaire / white cable
- ballast (LED converter) integrated in the stand

Standard options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833877
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	50.0 W
Luminaire luminous flux	3080 lm
System efficiency	61.60 lm/W
Module efficiency	178.36 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	622 mm
Width	325 mm
Height	1937 mm
Net weight	17.82 kg
Gross weight	19.02 kg

ASCL 10.0630.2 SENSO

Ascona (1xLED 50W 830/3000K 3080lm)




	C0	C90	C180	C270
0°	402	402	402	402
15°	380	380	380	380
30°	315	316	315	316
45°	229	233	229	233
60°	141	143	141	143
75°	56	58	56	58
90°	1	0	1	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	7.05	7.24	137.5
6.0	14.10	14.48	34.4
9.0	21.16	21.73	15.3
12.0	28.21	28.97	8.6
15.0	35.26	36.21	5.5

η	LED
Efficiency	62 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	50 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.2
UGR C90/C270	21.3
CIE Flux Codes	51 81 97 100 100
Ra/CRI	>80

LTS

Accessories



ZBB 002
luminaire base version 2



ZBC 001
remote control