

Pendant 48 V

NEO-ORYO-P 202.930.15/DALI



Description

- filigree pendant luminaire with slightly conical light-head for 48 V track system
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- clear safety glass
- 3-phase track adapter with integrated DALI ballast

Standard options






| Colours | Article no. | EAN |
|---------|-------------|---------------|
| black | 658404 | 4043544673183 |
| white | 658414 | 4043544673282 |

Lighting data / Norms

| | |
|-------------------------|----------------------------|
| Lamps | LED Spot / CRI 90 / 3000 K |
| Lifetime | L90 B50 50.000 h |
| | L80 B50 100.000 h |
| | L80 B20 50.000 h |
| System power | 26.7 W |
| Luminaire luminous flux | 2580 lm |
| System efficiency | 96.62 lm/W |
| Module efficiency | 128.55 lm/W |
| UGR class | ≤19 |
| Beam range | Spot |
| Beam angle | 18° |
| Protection class | II |
| Type of protection | IP20 |

Dimensions / Weights

| | |
|------------------------|---------|
| Outer diameter | 85 mm |
| Height | 71 mm |
| Diameter of light head | 85 mm |
| Net weight | 0.74 kg |
| Gross weight | 0.84 kg |

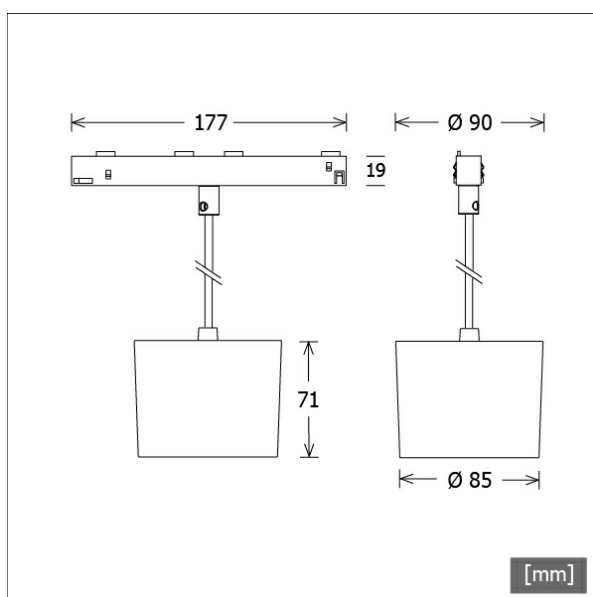


Pendant 48 V

NEO-ORYO-P 202.930.15/DALI

NEO-ORYO-P 202.930.15/DALI

ORYO 200 | Pendant (1xLED 27W 930/3000K 2580lm)

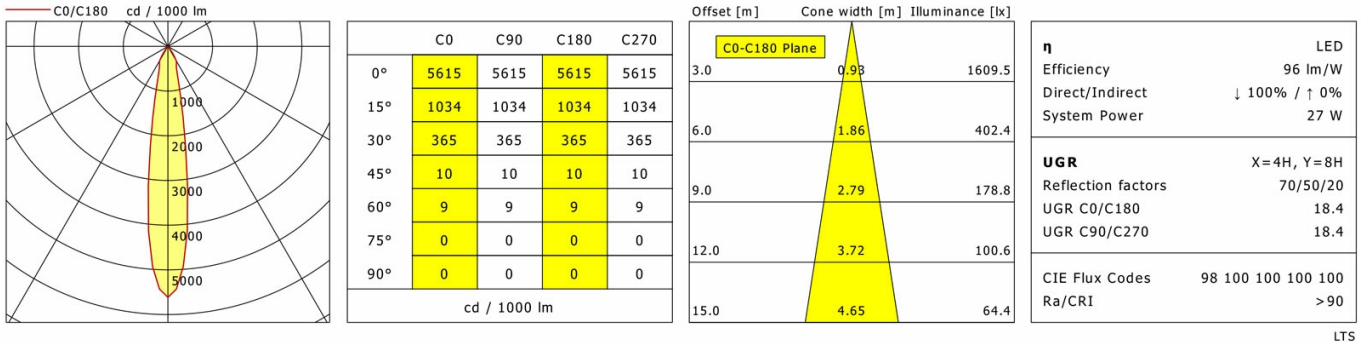

Accessories



NEO-A 10/9500-1/ST6-E
48 V surface-mounted track NeoLine with data bus
(length: 1000 mm)



NEO-A 20/9500-2/ST6-E
48 V surface-mounted track NeoLine with data bus
(length: 2000 mm)



NEO-A 30/9500-3/ST6-E
48 V surface-mounted track NeoLine with data bus
(length: 3000 mm)



NEO-Z CONV 1X150
power supply for 48 V systems 1x150 W



NEO-Z CONV 1X150/CAS
power supply for 48 V systems 1x150 W with
Casambi technology for wireless light control



NEO-Z CONV 2X150
power supply for 48 V systems 2x150 W



NEO-Z CONV 2X150/CAS
power supply for 48 V systems 2x150 W with
Casambi technology for wireless light control



ZB-AGS 002
anti-glare shield



ZB-DAR 002
decorative anti-glare ring



ZBW 89
honeycomb louvre