

## Pendant 48 V

## NEO-ORYO-P 202.940.15/DALI



## Description

- filigree pendant luminaire with slightly conical light-head for 48 V track system
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- clear safety glass
- 3-phase track adapter with integrated DALI ballast

## Standard options






| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| black   | 658407      | 4043544673213 |
| white   | 658417      | 4043544673312 |

## Lighting data / Norms

|                         |   |
|-------------------------|---|
| Lamps                   | LED Spot / CRI 90 / 4000 K                                |
| Lifetime                | L90 B50 50.000 h<br>L80 B50 100.000 h<br>L80 B20 50.000 h |
| System power            | 26.7 W  |
| Luminaire luminous flux | 2690 lm   |
| System efficiency       | 100.74 lm/W   |
| Module efficiency       | 135.81 lm/W   |
| UGR class               | ≤19   |
| Beam range              | Spot  |
| Beam angle              | 18°   |
| Protection class        | II  |
| Type of protection      | IP20  |

## Dimensions / Weights

|                        |         |
|------------------------|---------|
| Outer diameter         | 85 mm   |
| Height                 | 71 mm   |
| Diameter of light head | 85 mm   |
| Net weight             | 0.74 kg |
| Gross weight           | 0.84 kg |

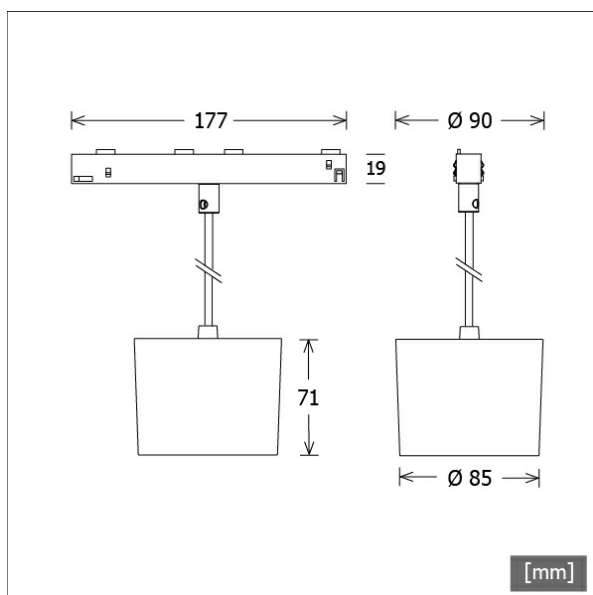


Pendant 48 V

# NEO-ORYO-P 202.940.15/DALI

## NEO-ORYO-P 202.940.15/DALI

ORYO 200 | Pendant (1xLED 27W 940/4000K 2690lm)



|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 5615 | 5615 | 5615 | 5615 |
| 15°          | 1034 | 1034 | 1034 | 1034 |
| 30°          | 365  | 365  | 365  | 365  |
| 45°          | 10   | 10   | 10   | 10   |
| 60°          | 9    | 9    | 9    | 9    |
| 75°          | 0    | 0    | 0    | 0    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0        | 0.93           | 1678.2           |
| 6.0        | 1.86           | 419.5            |
| 9.0        | 2.79           | 186.5            |
| 12.0       | 3.72           | 104.9            |
| 15.0       | 4.65           | 67.1             |

|                    |                    |
|--------------------|--------------------|
| <b>η</b>           | LED                |
| Efficiency         | 100 lm/W           |
| Direct/Indirect    | ↓ 100% / ↑ 0%      |
| System Power       | 27 W               |
| <b>UGR</b>         | X=4H, Y=8H         |
| Reflection factors | 70/50/20           |
| UGR C0/C180        | 18.6               |
| UGR C90/C270       | 18.6               |
| CIE Flux Codes     | 98 100 100 100 100 |
| Ra/CRI             | > 90               |

LTS

## Accessories



**NEO-A 10/9500-1/ST6-E**  
48 V surface-mounted track NeoLine with data bus  
(length: 1000 mm)



**NEO-A 20/9500-2/ST6-E**  
48 V surface-mounted track NeoLine with data bus  
(length: 2000 mm)



**NEO-A 30/9500-3/ST6-E**  
48 V surface-mounted track NeoLine with data bus  
(length: 3000 mm)



**NEO-Z CONV 1X150**  
power supply for 48 V systems 1x150 W



**NEO-Z CONV 1X150/CAS**  
power supply for 48 V systems 1x150 W with  
Casambi technology for wireless light control



**NEO-Z CONV 2X150**  
power supply for 48 V systems 2x150 W



**NEO-Z CONV 2X150/CAS**  
power supply for 48 V systems 2x150 W with  
Casambi technology for wireless light control



**ZB-AGS 002**  
anti-glare shield



**ZB-DAR 002**  
decorative anti-glare ring



**ZBW 89**  
honeycomb louvre