

ORYO-P 203.927.25/DALI-EU



Description

- pendant luminaire with slightly conical light-head
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- clear safety glass
- 3-phase track adapter DALI (Eutrac)

Standard options




Colours	Article no.	EAN
silver	651538	4043544772640
black	651593	4043544772657
white	651606	4043544772664

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	28.2 W
Luminaire luminous flux	2610 lm
System efficiency	92.55 lm/W
Module efficiency	121.29 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	29°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	85 mm
Height	71 mm
Diameter of light head	85 mm
Net weight	0.70 kg
Gross weight	0.84 kg

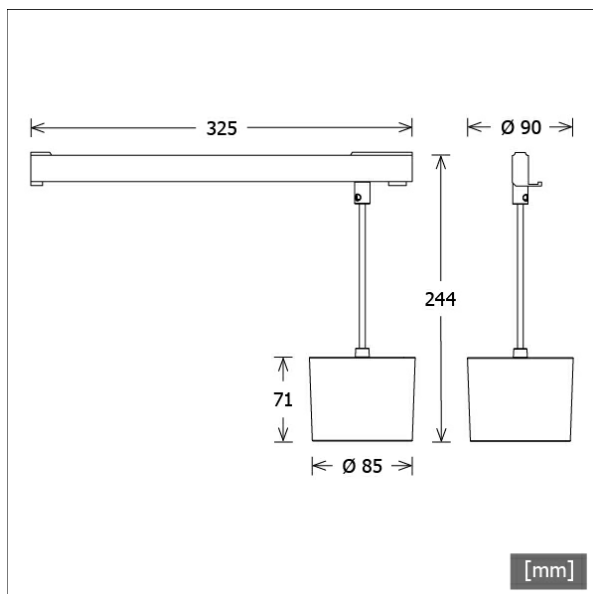

ORYO-P 203.927.25/DALI-EU

Oryo 200 | Pendant (1xLED 28W 927/2700K 2610lm 25°)



	C0	C90	C180	C270
0°	2848	2848	2848	2848
15°	1347	1347	1347	1347
30°	346	346	346	346
45°	12	12	12	12
60°	7	7	7	7
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.54	826.0
6.0	3.08	206.5
9.0	4.62	91.8
12.0	6.16	51.6
15.0	7.70	33.0

η	LED
Efficiency	93 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	28 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.3
UGR C90/C270	18.3
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>90

LTS

Accessories



ZB-AGS 002
anti-glare shield



ZB-DAR 002
decorative anti-glare ring



ZBW 89
honeycomb louvre