

## ORYO-P 203.930.15/DALI-ST



## Description

- pendant luminaire with slightly conical light-head
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- clear safety glass
- 3-phase track adapter (ONETrack) with integrated DALI ballast


## Notes

Compatible with power tracks ONETrack and Global Trac PULSE. Not compatible with ONETrack Trimless tracks.

## Standard options



Colours	Article no.	EAN
black	664180	4043544733122
white	664181	4043544733139
silver	664660	4043544737953


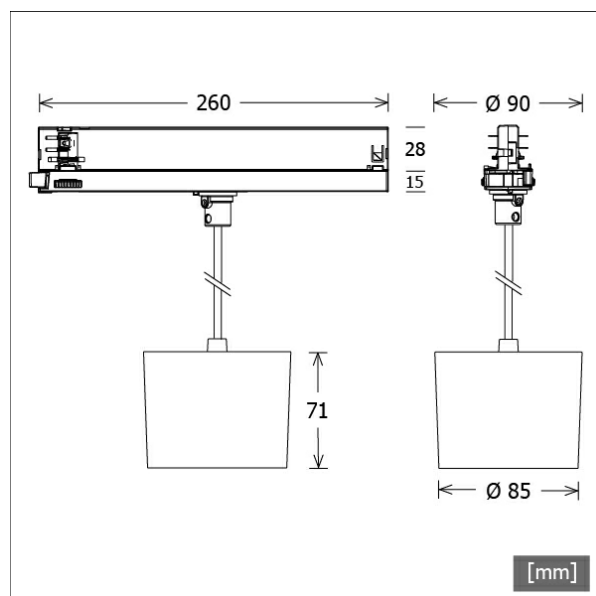


## Lighting data / Norms

<b>Lamps</b>	LED Spot / CRI 90 / 3000 K
<b>EPREL light sources</b>	851296
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
<b>Lifetime</b>	
<b>System power</b>	30.0 W
<b>Luminaire luminous flux</b>	2950 lm
<b>System efficiency</b>	98.33 lm/W
<b>Module efficiency</b>	134.21 lm/W
<b>UGR class</b>	≤19
<b>Beam range</b>	Spot
<b>Beam angle</b>	18°
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	II
<b>Type of protection</b>	IP20


## Dimensions / Weights

<b>Outer diameter</b>	85 mm
<b>Height</b>	71 mm
<b>Diameter of light head</b>	85 mm
<b>Net weight</b>	0.74 kg
<b>Gross weight</b>	0.84 kg

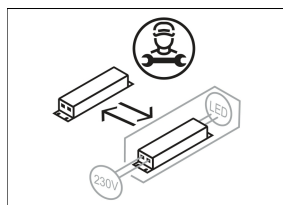

# ORYO-P 203.930.15/DALI-ST

Oryo 200 | Pendant (1xLED 30W 930/3000K 2950lm 15°)



	C0	C90	C180	C270
0°	5615	5615	5615	5615
15°	1034	1034	1034	1034
30°	365	365	365	365
45°	10	10	10	10
60°	9	9	9	9
75°	0	0	0	0
90°	0	0	0	0

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	0.99	1840.4
6.0	1.86	460.1
9.0	2.79	204.5
12.0	3.72	115.0
15.0	4.65	73.6

<b>η</b>	LED
Efficiency	99 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	30 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>90

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ZB-AGS 002**  
 anti-glare shield



**ZB-DAR 002**  
 decorative anti-glare ring



**ZB-OR DONGLE**  
 Organic Response IR dongle kit



**ZB-OR GATEWAY**  
 Organic Response IoT Gateway Cascade Series

Decorative Luminaires · ORYO 200 Track-Mounted Pendant



# ORYO-P 203.930.15/DALI-ST

## Accessories



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting



**ZBW 89**  
honeycomb louvre