


ORYO-R 101.940.25/DALI



Colours	Article no.	EAN
black	664122	4043544732545
white	664123	4043544732552
silver	664596	4043544737311

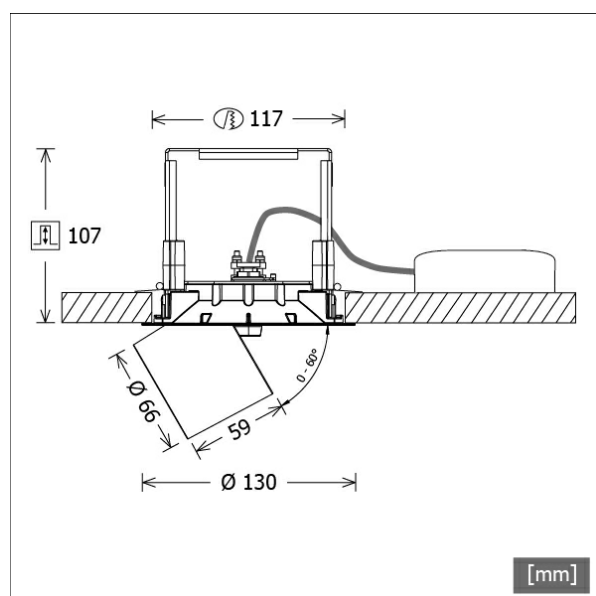


Description

- flexible filigree recessed spotlight with slightly conical light-head
- light-head extracts, rotates through 355° and pivots through 60° via articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- recessed frame made from die-cast zinc and sheet steel
- concealing plate for ceiling opening
- clear acrylic safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	854571
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	20.0 W
Luminaire luminous flux	1820 lm
System efficiency	91.00 lm/W
Module efficiency	140.95 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	30°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	130 mm
Height	108 mm
Cut-out (Ø)	117 mm
Ceiling thickness	9.0 - 50.0 mm
Recessed depth	107 mm
Diameter of light head	66 mm

Recessed Spotlights · ORYO 100 Recessed

ORYO-R 101.940.25/DALI

Net weight
Gross weight




LTS
LOVE TO SHINE

0.95 kg
1.06 kg

ORYO-R 101.940.25/DALI

Oryo 100 | Recessed (1xLED 20W 940/4000K 1820lm 25 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	2753	2753	2753	2753
15°	1403	1403	1403	1403
30°	332	332	332	332
45°	17	17	17	17
60°	7	7	7	7
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.63	556.7
6.0	3.26	139.2
9.0	4.89	61.9
12.0	6.53	34.8
15.0	8.16	22.3

η	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	20 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.4
UGR C90/C270	19.4
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>90

LTS

Accessories



ZB-AGS 001
anti-glare shield



ZB-DAR 001
decorative anti-glare ring



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting



ZBW 88
honeycomb louvre