




ORYO-R 203.930.15



Colours	Article no.	EAN
black	664214	4043544733467
white	664215	4043544733474
silver	664695	4043544738301

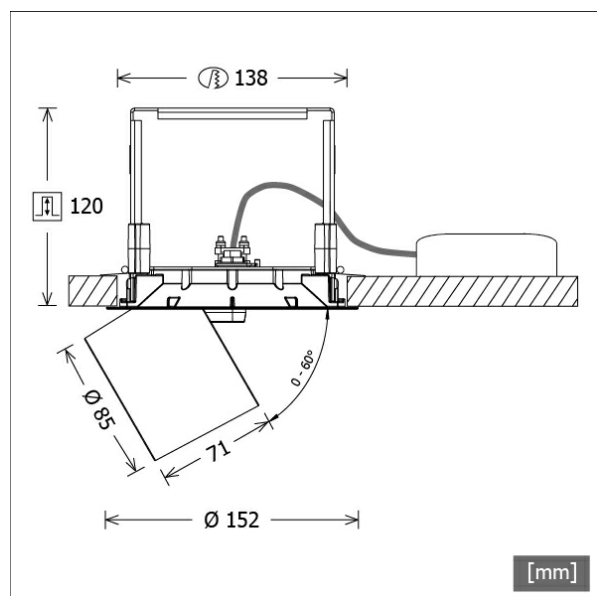

Description

- flexible recessed spotlight with slightly conical light-head
- light-head extracts, rotates through 355° and pivots through 60° via articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- recessed frame made from die-cast zinc and sheet steel
- concealing plate for ceiling opening
- clear safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851296
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	30.0 W
Luminaire luminous flux	2950 lm
System efficiency	98.33 lm/W
Module efficiency	134.21 lm/W
UGR class	≤19
Beam range	Spot
Beam angle	18°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	152 mm
Height	121 mm
Cut-out (Ø)	138 mm
Ceiling thickness	9.0 - 50.0 mm
Recessed depth	120 mm
Diameter of light head	85 mm

Recessed Spotlights · ORYO 200 Recessed

ORYO-R 203.930.15

Net weight
Gross weight




LTS
LOVE TO SHINE

1.24 kg
1.35 kg

ORYO-R 203.930.15

Oryo 200 | Recessed (1xLED 30W 930/3000K 2950lm 15 °)



	C0	C90	C180	C270
0°	5615	5615	5615	5615
15°	1034	1034	1034	1034
30°	365	365	365	365
45°	10	10	10	10
60°	9	9	9	9
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.99	1840.4
6.0	1.86	460.1
9.0	2.79	204.5
12.0	3.72	115.0
15.0	4.65	73.6

η	LED
Efficiency	99 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	30 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>90

LTS

Accessories



ZB-AGS 002
anti-glare shield



ZB-DAR 002
decorative anti-glare ring



ZBW 89
honeycomb louvre