




ORYO-T 101.927.15/DALI-EU



Colours	Article no.	EAN
silver	667838	4043544771797
black	667839	4043544771803
white	667840	4043544771810

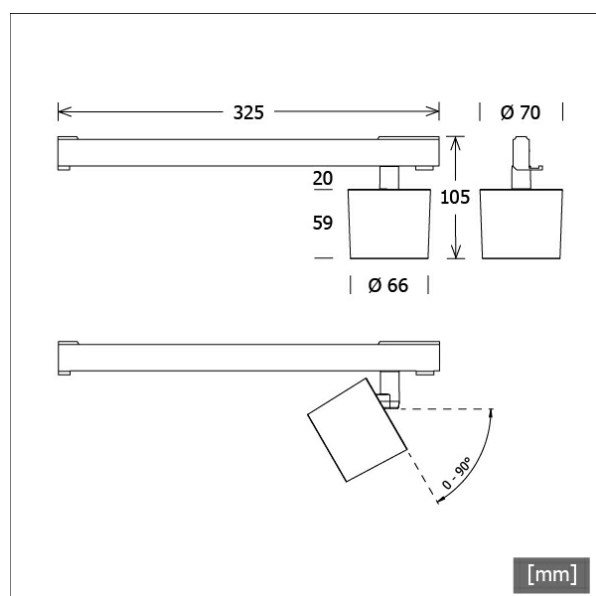

Description

- flexible filigree track-mounted spotlight with slightly conical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- clear acrylic safety glass
- 3-phase track adapter DALI (Eutrac)

Standard options



Lighting data / Norms


Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	881944
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	18.0 W
Luminaire luminous flux	1320 lm
System efficiency	73.33 lm/W
Module efficiency	124.38 lm/W
UGR class	≤19
Beam range	Spot
Beam angle	15°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Length	325 mm
Width	66 mm
Height	79 mm
Diameter of light head	66 mm
Net weight	0.41 kg
Gross weight	0.56 kg

ORYO-T 101.927.15/DALI-EU

Oryo 100 | Track-Mounted (1xLED 18W 927/2700K 1320lm 15°)

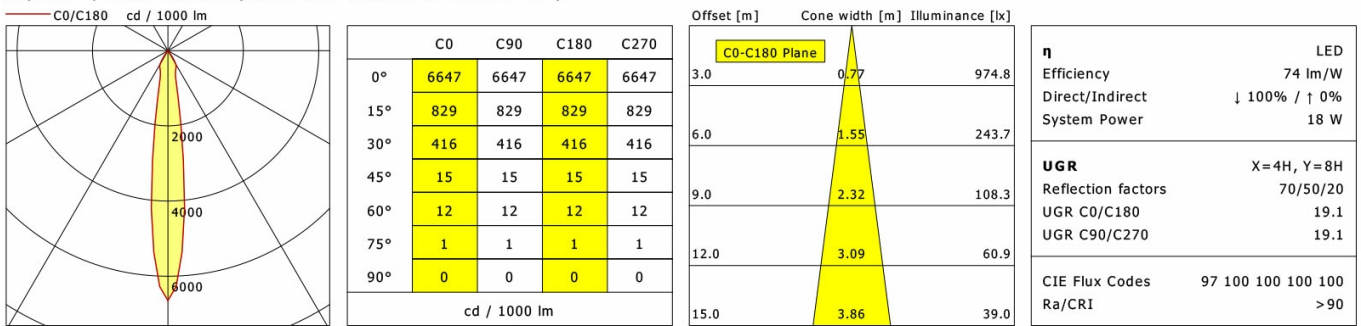

LTS

Accessories



ZB-AGS 001
anti-glare shield



ZB-DAR 001
decorative anti-glare ring



ZBW 88
honeycomb louvre