

ORYO-T 101.930.45/DALI-EU



Description

- flexible filigree track-mounted spotlight with slightly conical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- clear acrylic safety glass
- 3-phase track adapter DALI (Eutrac)

Standard options




Colours	Article no.	EAN
silver	667853	4043544771940
black	667854	4043544771957
white	667855	4043544771964

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851296
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	20.0 W
System power	1840 lm
Luminaire luminous flux	92.00 lm/W
System efficiency	134.21 lm/W
Module efficiency	≤22
UGR class	Wide Flood
Beam range	46°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	II
Protection class	IP20
Type of protection	


Dimensions / Weights

Length	325 mm
Width	66 mm
Height	79 mm
Diameter of light head	66 mm
Net weight	0.41 kg
Gross weight	0.56 kg

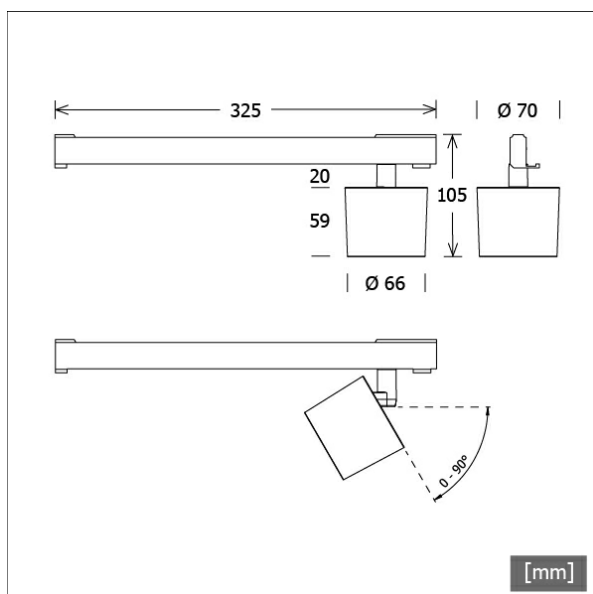

ORYO-T 101.930.45/DALI-EU

Oryo 100 | Track-Mounted (1xLED 20W 930/3000K 1840lm 45°)



	C0	C90	C180	C270
0°	1636	1636	1636	1636
15°	1232	1232	1232	1232
30°	461	461	461	461
45°	24	24	24	24
60°	8	8	8	8
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	2.54	334.5
6.0	5.08	83.6
9.0	7.62	37.2
12.0	10.16	20.9
15.0	12.70	13.4

η	LED
Efficiency	92 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	20 W
UGR	
X=4H, Y=8H	
Reflection factors	70/50/20
UGR C0/C180	21.5
UGR C90/C270	21.5
CIE Flux Codes	
Ra/CRI	96 99 100 100 100
	>90

LTS

Accessories



ZB-AGS 001
anti-glare shield



ZB-DAR 001
decorative anti-glare ring



ZBW 88
honeycomb louvre