


PIANO-S 080.0530/DIM



Colours	Article no.	EAN
black	648717	4043544561336
silver	648718	4043544561343
white	648719	4043544561350

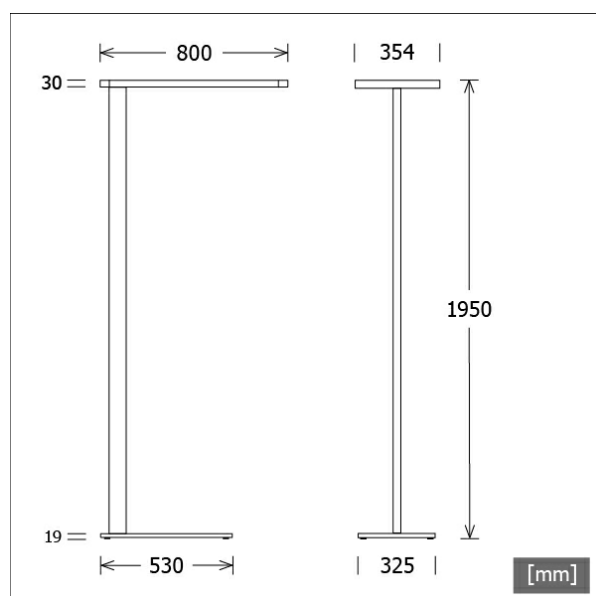

Description

- free-standing luminaire with direct-indirect illumination for uniform and glare-free workplace lighting
- light component: direct 50% / indirect 50%
- outstanding ease of maintenance
- light-head made from aluminium and die-cast zinc
- rectangular stand made from aluminium
- standard base made from steel St37 (special version ZBB 002 please indicate when ordering)
- switchDIM with memory function (ON/OFF short pushbutton press, dimming UP/DOWN long pushbutton press)
- diffuser made from prismatic acrylic glass with side-emitting LEDs (diffuser is completely transparent when switched off)
- central plug connection to mains (length of connecting cable: approx. 3000 mm), black and silver luminaire / black cable, white luminaire / white cable
- ballast (LED converter) integrated in the light-head

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	63.0 W
Luminaire luminous flux	5930 lm
System efficiency	94.12 lm/W
Module efficiency	164.35 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	800 mm
Width	354 mm
Height	1950 mm
Net weight	22.15 kg
Gross weight	23.46 kg

PIANO-S 080.0530/DIM

Piano Standing (1xLED 63W 830/3000K 5930lm)



	C0	C90	C180	C270
0°	272	272	272	272
30°	153	190	153	190
60°	72	95	72	95
90°	1	2	1	2
120°	183	79	183	79
150°	33	29	33	29
180°	11	11	11	11
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	94 lm/W
Direct/Indirect	↓ 57% / ↑ 43%
System Power	63 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	20.7
CIE Flux Codes	48 77 94 57 100
Ra/CRI	> 80

LTS

Accessories



ZBB 002
luminaire base version 2