




PLL 20.1500.830/DALI



Colours	Article no.	EAN
	640107	4043544436658

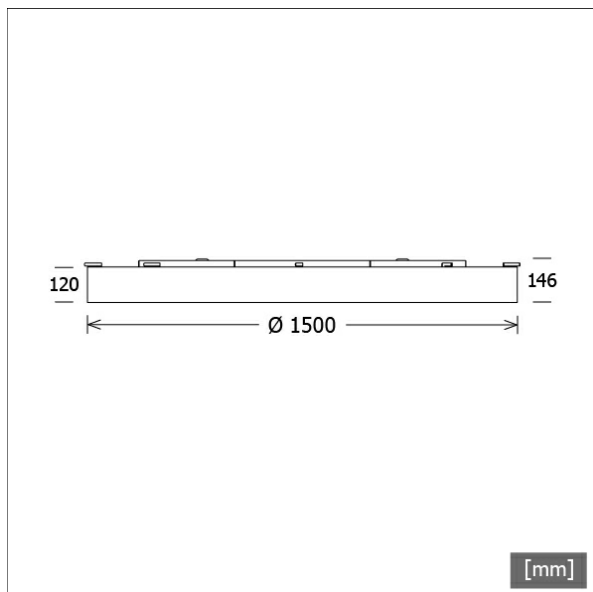

Description

- prestigious ceiling and pendant luminaire with round, opal acrylic glass cover for homogeneous lighting and balanced room ambience
- easy maintenance
- no UV and thermal emissions
- ceiling mounting plate and removable LED unit made from sheet steel
- wire-rope suspension to be ordered separately
- pendant-rod suspension on request
- opal acrylic glass cover (removable via lock fasteners)
- mounting plate for easy screw fastening
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
EPREL light sources	833877 833872 833867
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	241.0 W
Luminaire luminous flux	24970 lm
System efficiency	103.60 lm/W
Module efficiency	178.39 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	1500 mm
Height	146 mm
Net weight	48.00 kg
Gross weight	113.00 kg

PLL 20.1500.830/DALI

PLL 20.1500.830/DALI

PL 20 (1xLED 241W 830/3000K 24970lm)

— C0/C180 cd / 1000 lm - - - - - C90/C270



	C0	C90	C180	C270
0°	302	302	302	302
15°	291	291	291	291
30°	260	259	260	259
45°	211	212	211	212
60°	146	147	146	147
75°	71	71	71	71
90°	15	15	15	15
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	9.95 10.02		837.6
6.0	19.91 20.05		209.4
9.0	29.86 30.07		93.1
12.0	39.82 40.10		52.3
15.0	49.77 50.12		33.5

η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 93% / ↑ 7%
System Power	241 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.5
UGR C90/C270	21.5
CIE Flux Codes	44 76 94 93 100
Ra/CRI	>80

LTS

Accessories



L 84/3000 DIM
wire-rope kit 8-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting