




ASCL 10.1130.1 SENSO



Colours	Article no.	EAN
silver	634330	4043544363947
white	634331	4043544363954

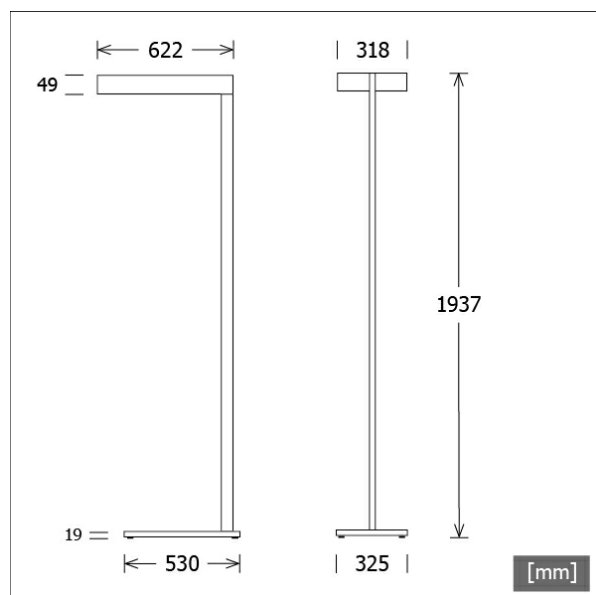

Description

- free-standing luminaire with direct-indirect illumination for uniform and glare-free workplace lighting
- light component: direct 40% / indirect 60%
- no UV and thermal emissions
- twin light-head made from die-cast aluminium
- standard base made from steel St37 (special version ZBB 002 please indicate when ordering)
- rectangular aluminium stand (silver luminaire with silver anodised stand)
- automatic sensors for presence and daylight
- diffusers made from decorative laminated safety glasses with matt foil for direct light component, diffusers for indirect light component made from clear acrylic glass
- central plug connection to mains (length of connecting cable: approx. 3000 mm), silver luminaire / black cable, white luminaire / white cable
- ballast (LED converter) integrated in the stand

Standard options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833894 833877
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	101.0 W
Luminaire luminous flux	7740 lm
System efficiency	76.63 lm/W
Module efficiency	177.91 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	622 mm
Width	325 mm
Height	1937 mm
Net weight	17.82 kg
Gross weight	19.02 kg

ASCL 10.1130.1 SENSO

Ascona (1xLED 101W 830/3000K 7740lm)




	C0	C90	C180	C270
0°	159	159	159	159
30°	124	124	124	124
60°	54	55	54	55
90°	0	1	0	1
120°	96	94	96	94
150°	199	192	199	192
180°	227	227	227	227
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	77 lm/W
Direct/Indirect	↓ 39% / ↑ 61%
System Power	101 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	15.5
UGR C90/C270	15.7
CIE Flux Codes	52 82 97 39 100
Ra/CRI	>80

LTS

Accessories



ZBB 002
luminaire base version 2



ZBC 001
remote control