


PLL 22.0385.840.2/DALI



Colours	Article no.	EAN
silver	633880	4043544358790
white	633881	4043544358806
black	642183	4043544479747

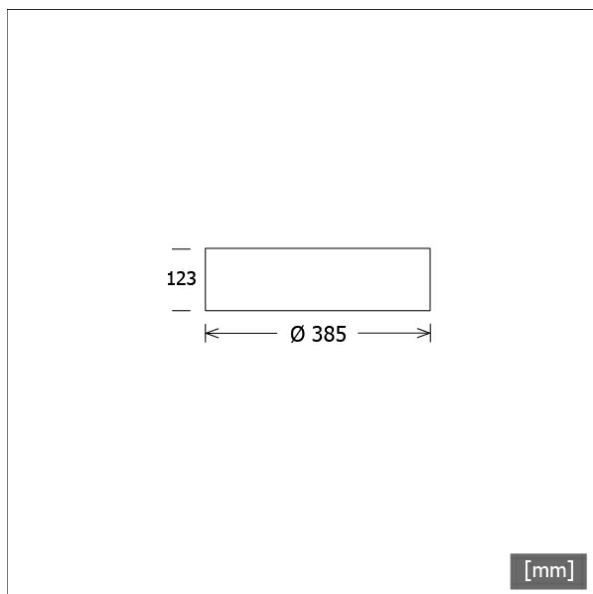

Description

- prestigious ceiling and pendant luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately
- microprismatic insert pane with matt foil made from acrylic glass
- easy ceiling screw mounting of the housing
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833873
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	17.7 W
Luminaire luminous flux	1440 lm
System efficiency	81.35 lm/W
Module efficiency	190.00 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	385 mm
Height	123 mm
Net weight	3.67 kg
Gross weight	4.28 kg

PLL 22.0385.840.2/DALI

PLL 22.0385.840.2/DALI

PL 22 (1xLED 18W 840/4000K 1440lm)

— C0/C180 cd / 1000 lm - - - - C90/C270



	C0	C90	C180	C270
0°	461	461	461	461
15°	439	436	439	436
30°	383	380	383	380
45°	233	234	233	234
60°	100	109	100	109
75°	40	43	40	43
90°	2	2	2	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	6.06 6.19	73.7	
6.0	12.12 12.37	18.4	
9.0	18.18 18.56	8.2	
12.0	24.24 24.74	4.6	
15.0	30.30 30.93	2.9	

η	LED
Efficiency	80 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.1
UGR C90/C270	19.2
CIE Flux Codes	60 87 97 100 100
Ra/CRI	>80

LTS

Accessories



L 71/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 71/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting