

PLL 22.0475.830.2/DALI



Description

- prestigious ceiling and pendant luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately
- microprismatic insert pane with matt foil made from acrylic glass
- easy ceiling screw mounting of the housing
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options

4000 K

Special options






Colours	Article no.	EAN
silver	633886	4043544358851
white	633887	4043544358868
black	642185	4043544479761

Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833872
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	31.4 W
Luminaire luminous flux	2440 lm
System efficiency	77.70 lm/W
Module efficiency	181.52 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	475 mm
Height	123 mm
Net weight	4.73 kg
Gross weight	5.15 kg

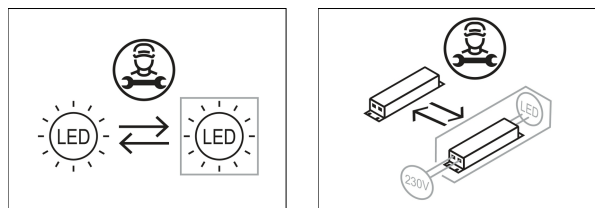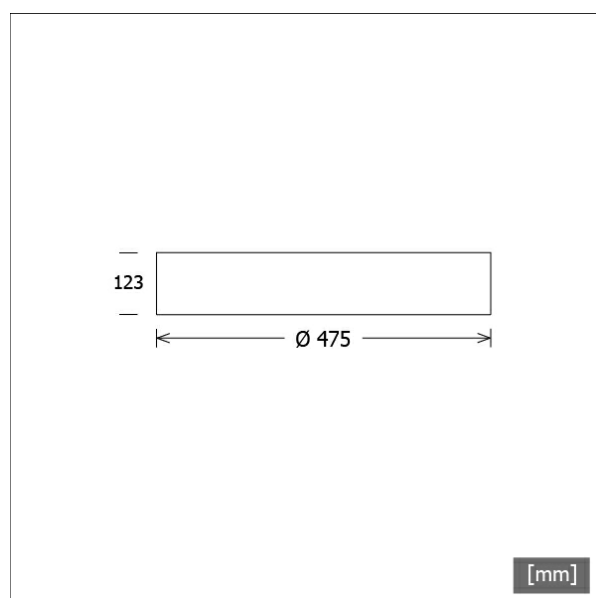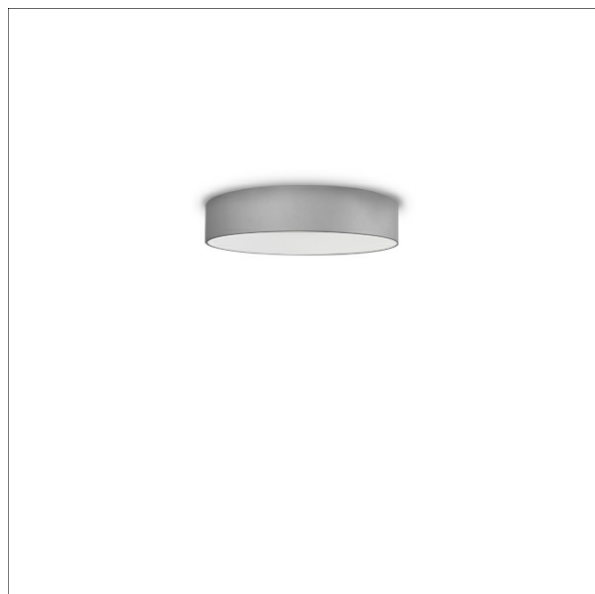


PLL 22.0475.830.2/DALI

PLL 22.0475.830.2/DALI

PL 22 (1xLED 31W 830/3000K 2440lm)



	C0	C90	C180	C270
0°	460	460	460	460
15°	438	437	438	437
30°	381	381	381	381
45°	238	237	238	237
60°	108	117	108	117
75°	43	45	43	45
90°	1	1	1	1
cd / 1000 lm				



η	LED
Efficiency	79 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	31 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.3
UGR C90/C270	19.4
CIE Flux Codes	60 87 97 100 100
Ra/CRI	>80

LTS

Accessories



L 71/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 71/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting