



PLL 22.0475.840.2/DALI

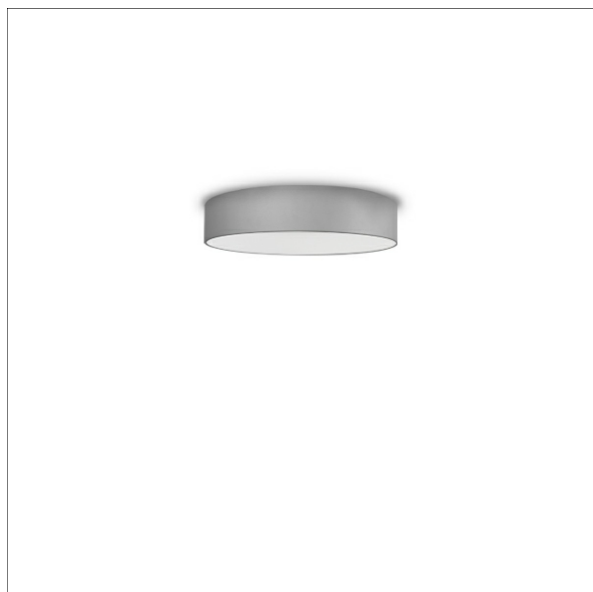

Colours	Article no.	EAN
silver	633888	4043544358875
white	633889	4043544358882
black	642187	4043544479785

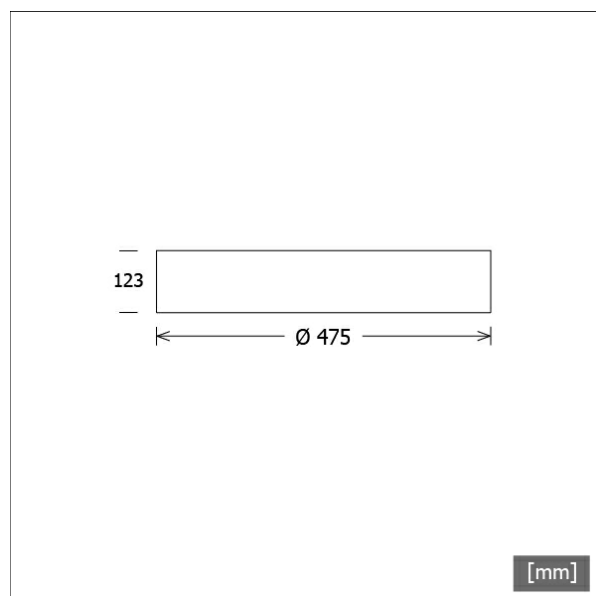

Description

- prestigious ceiling and pendant luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately
- microprismatic insert pane with matt foil made from acrylic glass
- easy ceiling screw mounting of the housing
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833873
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	31.4 W
Luminaire luminous flux	2520 lm
System efficiency	80.25 lm/W
Module efficiency	190.00 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	475 mm
Height	123 mm
Net weight	4.73 kg
Gross weight	5.15 kg

PLL 22.0475.840.2/DALI

PLL 22.0475.840.2/DALI

PL 22 (1xLED 31W 840/4000K 2520lm)

— C0/C180 cd / 1000 lm - - - - C90/C270



	C0	C90	C180	C270
0°	460	460	460	460
15°	438	437	438	437
30°	381	381	381	381
45°	238	237	238	237
60°	108	117	108	117
75°	43	45	43	45
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	6.18 6.23		128.7
6.0	12.36 12.47		32.2
9.0	18.54 18.70		14.3
12.0	24.72 24.94		8.0
15.0	30.90 31.17		5.1

η	LED
Efficiency	81 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	31 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.4
UGR C90/C270	19.5
CIE Flux Codes	60 87 97 100 100
Ra/CRI	>80

LTS

Accessories



L 71/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 71/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting