

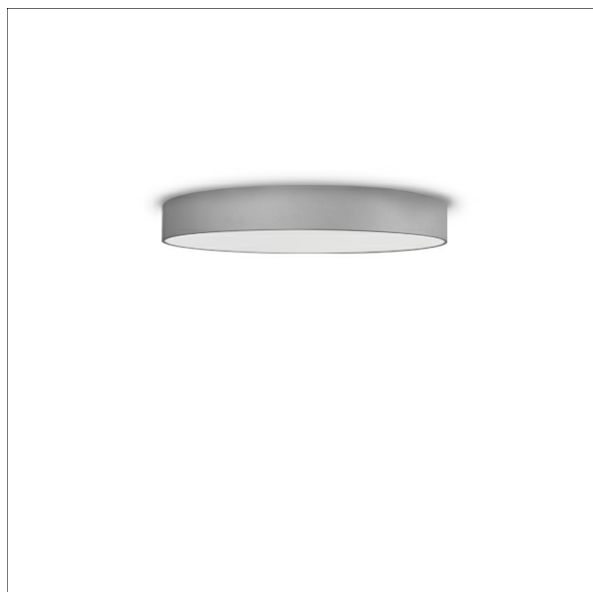



PLL 22.0675.830.1/DALI



Colours	Article no.	EAN
silver	633890	4043544358899
white	633891	4043544358905
black	642188	4043544479792

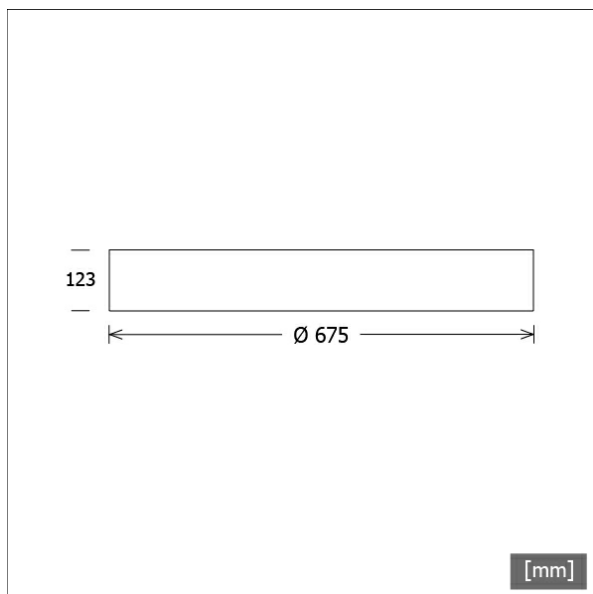

Description

- prestigious ceiling and pendant luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately
- opal insert pane made from acrylic glass
- easy ceiling screw mounting of the housing
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833872 833877
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	66.7 W
Luminaire luminous flux	7130 lm
System efficiency	106.89 lm/W
Module efficiency	179.94 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	675 mm
Height	123 mm
Net weight	9.32 kg
Gross weight	10.76 kg

PLL 22.0675.830.1/DALI

PLL 22.0675.830.1/DALI

PL 22 (1xLED 67W 830/3000K 7130lm)

— C0/C180 cd / 1000 lm - - - - C90/C270



	C0	C90	C180	C270
0°	355	355	355	355
15°	340	339	340	339
30°	298	297	298	297
45°	234	234	234	234
60°	154	155	154	155
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	8.88 8.86		281.2
6.0	17.76 17.72		70.3
9.0	26.64 26.59		31.2
12.0	35.53 35.45		17.6
15.0	44.41 44.31		11.2

η	LED
Efficiency	106 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	67 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.9
UGR C90/C270	22.9
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

Accessories



L 71/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 71/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting