



PLL 22.0675.830.2/DALI

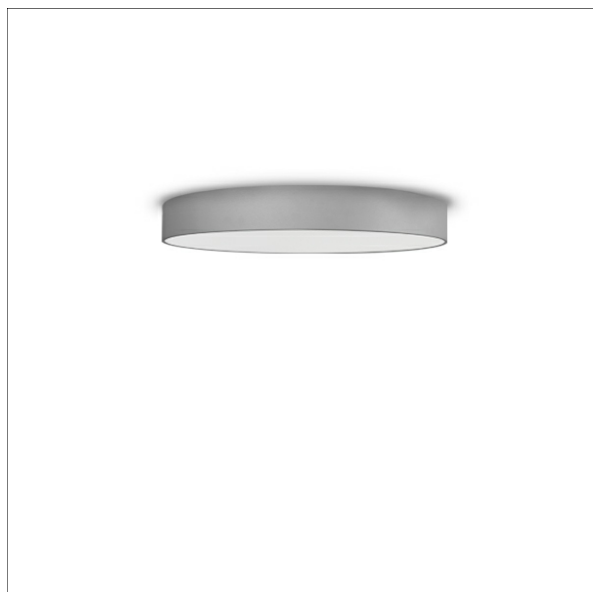

Colours	Article no.	EAN
silver	633894	4043544358936
white	633897	4043544358943
black	642189	4043544479808

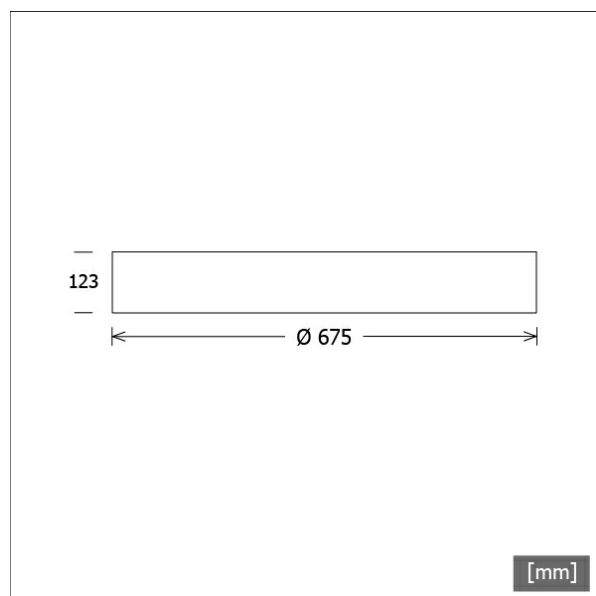

Description

- prestigious ceiling and pendant luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately
- microprismatic insert pane with matt foil made from acrylic glass
- easy ceiling screw mounting of the housing
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833872 833877
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	66.7 W
Luminaire luminous flux	5140 lm
System efficiency	77.06 lm/W
Module efficiency	179.94 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	675 mm
Height	123 mm
Net weight	9.32 kg
Gross weight	10.76 kg

PLL 22.0675.830.2/DALI

PLL 22.0675.830.2/DALI

PL 22 (1xLED 67W 830/3000K 5140lm)

C0/C180 cd / 1000 lm C90/C270



	C0	C90	C180	C270
0°	459	459	459	459
15°	439	438	439	438
30°	378	376	378	376
45°	226	225	226	225
60°	85	92	85	92
75°	43	37	43	37
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	5.96 5.94		262.2
6.0	11.92 11.87		65.5
9.0	17.87 17.81		29.1
12.0	23.83 23.74		16.4
15.0	29.79 29.68		10.5

η	LED
Efficiency	77 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	67 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.3
UGR C90/C270	19.3
CIE Flux Codes	60 86 97 100 100
Ra/CRI	>80

LTS

Accessories



L 71/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 71/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting