

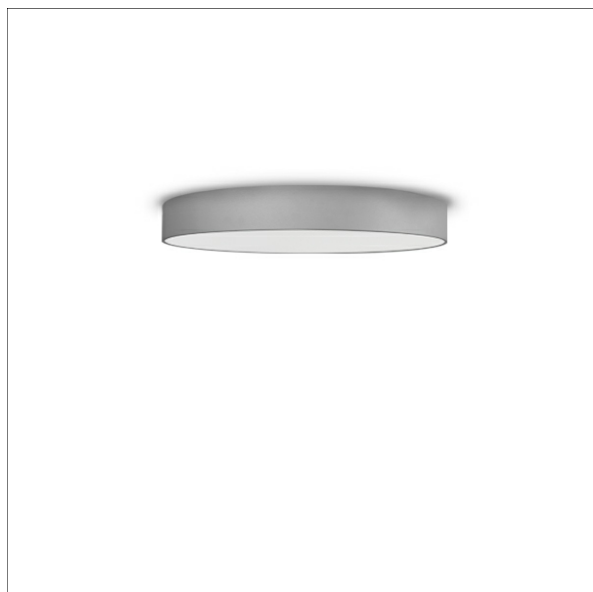



PLL 22.0675.840.1/DALI



Colours	Article no.	EAN
silver	633892	4043544358912
white	633893	4043544358929
black	642190	4043544479815

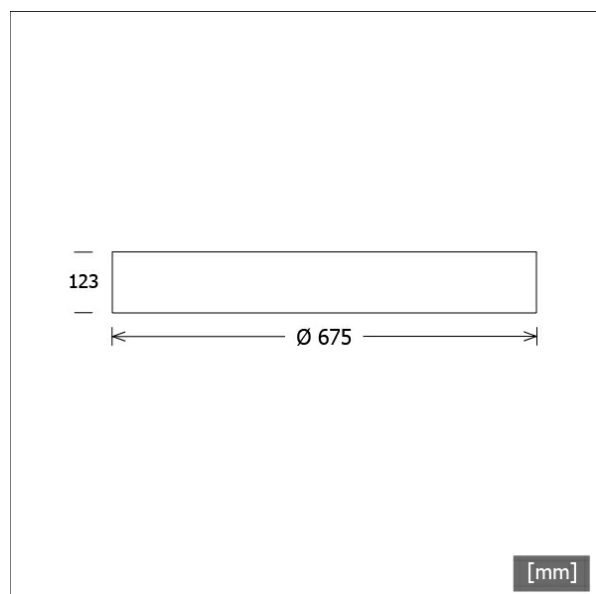

Description

- prestigious ceiling and pendant luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately
- opal insert pane made from acrylic glass
- easy ceiling screw mounting of the housing
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	66.7 W
Luminaire luminous flux	7350 lm
System efficiency	110.19 lm/W
Module efficiency	154.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	675 mm
Height	123 mm
Net weight	9.32 kg
Gross weight	10.76 kg

PLL 22.0675.840.1/DALI

PLL 22.0675.840.1/DALI

PL 22 (1xLED 67W 840/4000K 7350lm)

— C0/C180 cd / 1000 lm - - - - C90/C270



	C0	C90	C180	C270
0°	355	355	355	355
15°	340	339	340	339
30°	298	297	298	297
45°	234	234	234	234
60°	154	155	154	155
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	8.88 8.86		289.9
6.0	17.76 17.72		72.5
9.0	26.64 26.59		32.2
12.0	35.53 35.45		18.1
15.0	44.41 44.31		11.6

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	67 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.0
UGR C90/C270	23.0
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

Accessories



L 71/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 71/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting