




PLL 23.1000.840.1/DALI



Colours	Article no.	EAN
silver	633923	4043544359193
white	633924	4043544359209
black	642271	4043544480583

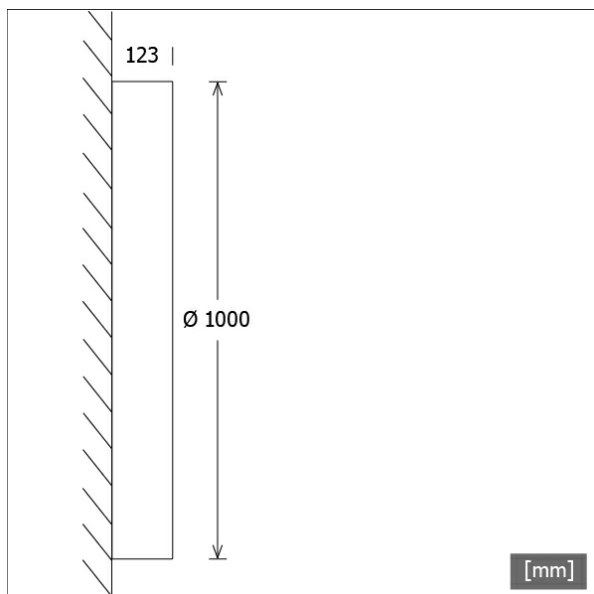

Description

- prestigious wall luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing removable via bayonet catch
- opal acrylic glass pane
- mounting plate for easy screw fastening
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833873 833878
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	141.3 W
Luminaire luminous flux	17500 lm
System efficiency	123.84 lm/W
Module efficiency	187.99 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	1000 mm
Height	123 mm
Net weight	19.00 kg
Gross weight	23.00 kg

PLL 23.1000.840.1/DALI

PLL 23.1000.840.1/DALI

PL 23 (1xLED 141W 840/4000K 17500lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	357	357	357	357
15°	342	343	342	343
30°	299	297	299	297
45°	234	234	234	234
60°	154	154	154	154
75°	65	64	65	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	8.81 8.73		694.2
6.0	17.63 17.47		173.6
9.0	26.44 26.20		77.1
12.0	35.26 34.94		43.4
15.0	44.07 43.67		27.8

η	LED
Efficiency	124 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	141 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.2
UGR C90/C270	23.2
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting