




PLL 23.0385.830.1/DALI



Colours	Article no.	EAN
silver	633908	4043544359056
white	633909	4043544359063
black	642272	4043544480590

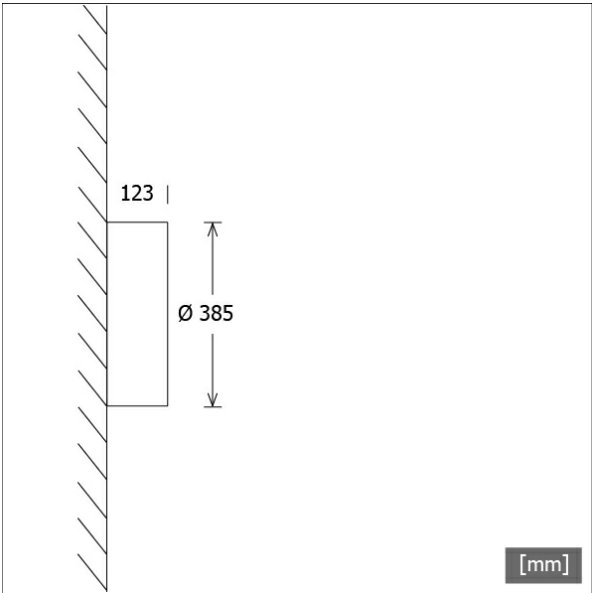

Description

- prestigious wall luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing removable via bayonet catch
- opal acrylic glass pane
- mounting plate for easy screw fastening
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833872
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	17.7 W
Luminaire luminous flux	1920 lm
System efficiency	108.47 lm/W
Module efficiency	181.52 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	385 mm
Height	123 mm
Net weight	3.78 kg
Gross weight	4.44 kg

PLL 23.0385.830.1/DALI

PLL 23.0385.830.1/DALI

PL 23 (1xLED 18W 830/3000K 1920lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

	C0-C180 Plane	C90-C270 Plane	
3.0	8.70 8.71		76.7
6.0	17.41 17.41		19.2
9.0	26.11 26.12		8.5
12.0	34.82 34.82		4.8
15.0	43.52 43.53		3.1

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.3
UGR C90/C270	22.3
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting